



7			8		9	
REVISION LIST						
ITEM	ECN/FN NO.	POSITION	DESCRIPTION		DATE	APPROVED BY
			WAS	IS		

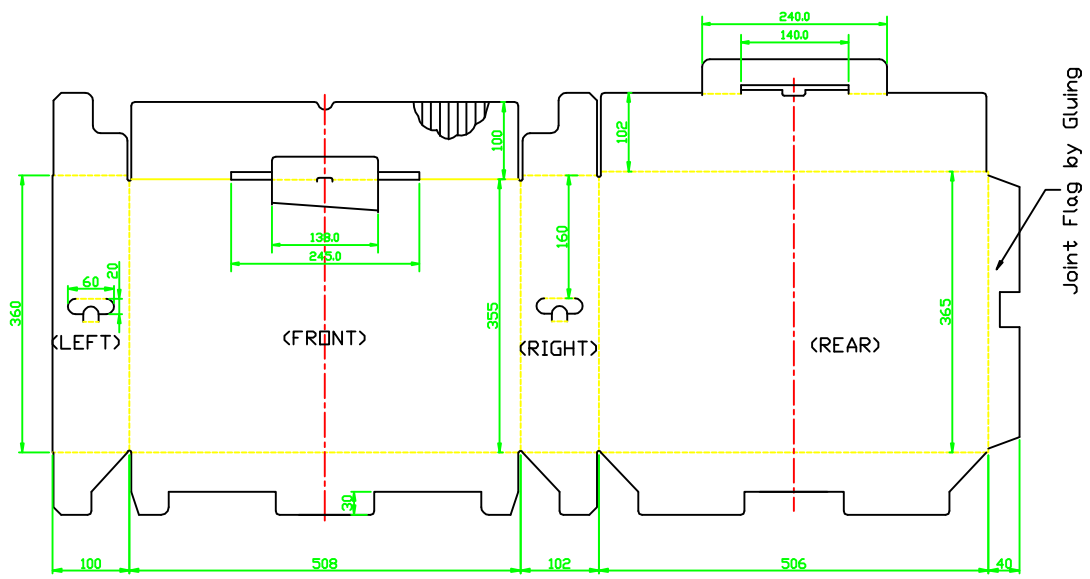

INSIDE DIMENSION:
503(L)x97(W)x345(H)
SCORELINE DIMENSION:
508(L)x102(W)x365(H)
OUTSIDE DIMENSION:
513(L)x107(W)x370(H)



- NOTE:
- 1.MATERIAL:DOUBLE WALL CORRUGATED FIBERBOARD "BE" FLUTE.
 - 2.BURSTING STRENGTH 14kgf/cm²
 - 3.COMPRESSION STRENGTH:(200)KGF.
 - 4.TOLERANCE $\pm\frac{2}{0}$ UNLESS OTHERWISE SPECIFIED.
 - 5.COLOR:ORIGINAL.
 - 6." ————— "CUT LINE.
" - - - - - "SCORED LINE.
 - 7.Doggy door pull out strength:1.5kgf<N<3.5kgf
 - 8.Pull:600kgf

TOLERANCE UNLESS OTHERWISE SPECIFIED (mm)				
RANGE OF DIM.	CUSHION	CARTON	WALL THICKNESS	CUSHION
<100	+0/-2	+2/-0	<25	+2/-0
<400	+0/-2	+2/-0	≥25	+2/-0
400-600	+0/-2	+2/-0		
601-800	+0/-2	+2/-0		
801-1000	+0/-2	+2/-0		

MODEL: AOC I2080SW for WW	PROJ 3D:	PROJ 2D:
UNIT: MM	TOLERANCES UNLESS OTHERWISE STATED	DIMENSIONS ANGLE
SCALE: 1/1	3rd PROJ:	TREATMENT MATERIAL
CARTON		110 1-1 A4
DRAWN: Chengrong.zhou	DATE: 20150210	TPV Technology Ltd.
CHECK:	DATE:	F0 INT

COMPLY WITH
RoHS