


A FEAST FOR YOUR EYES

FUJITSU DISPLAYS

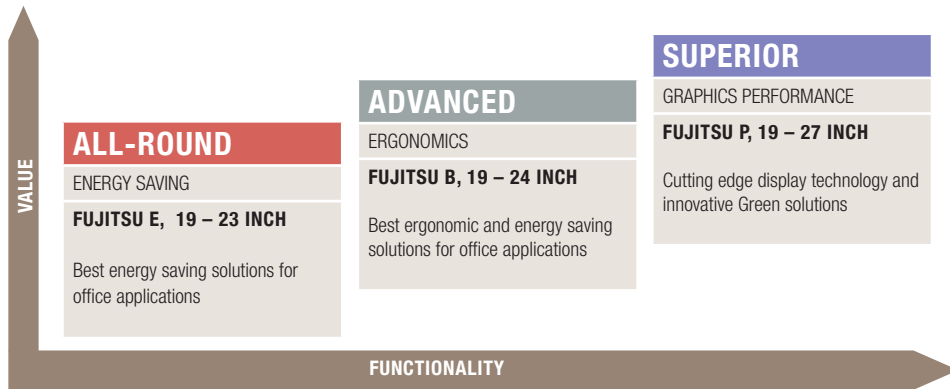

IPS (IN PLANE SWITCHING)

- IPS panel technology for best picture performance
- Ultra-wide viewing angle and brilliant view from any perspective
- Outstanding brightness uniformity and grey scaling
- 102% color gamut (27-inch)
- Perfect greyscales with DICOM optimized gamma preset

LED BACKLIT TECHNOLOGY

- Ultra high contrast and all-over illumination due to many small LED elements
- Economical in power consumption: around 30% less power than latest Energy Star requirements.
- Environment-friendly thanks to mercury-free LED backlit panels

0-WATT

- P Line offers 0-Watt power consumption in off-mode (VGA and DVI)
- Unique and patent applied technology – worldwide

ECO SYSTEM

- Eco mode for power saving potential of up to 50% in operation
- Eco Key - activate the Eco mode by one key stroke
- Control LED in 3 colors for the three levels of the mode

ABC (AUTOMATIC BRIGHTNESS CONTROL)

- Sensor for automatic brightness adjustment depending on illumination around the display
- Stress-free and ergonomic view for the eyes due to an always balanced contrast between screen content and background around the display

ERGO KEYS

- Easy access to the 6 + 1 OSD keys
- Simplified usage of the menu with 2 additional keys

DO YOU NEED MAINTENANCE AND SERVICE SUPPORT?

➔ Link: <http://ts.fujitsu.com/servicepositioning>



Contact

Email: wps.info@ts.fujitsu.com
 Website: <http://ts.fujitsu.com/displays>
 Partner: <http://partners.ts.fujitsu.com/displays>
 2010-10 CE-EN

Copyright

© Fujitsu Technology Solutions 2010
 All hardware and software names used are brand names and/or trademarks of their respective holders.

ALL-ROUND	ADVANCED	SUPERIOR
ENERGY SAVING	ERGONOMICS	GRAPHICS PERFORMANCE
FUJITSU E LINE 23-inch widescreen / 22-inch widescreen 19-inch widescreen / 19-inch	FUJITSU B LINE 24-inch widescreen / 23-inch widescreen 22-inch widescreen / 19-inch widescreen 19-inch	FUJITSU P LINE 27-inch widescreen / 24-inch widescreen 23-inch widescreen / 22-inch widescreen 19-inch
<ul style="list-style-type: none"> • LED backlit* • HDCP, DVI, VGA • ECO operation mode, ECO key and status LED • Matt black • TCO 5.0 • EPA 5.0 • Windows® 7 certified 	<ul style="list-style-type: none"> • Ergonomic design • LED backlit* • HDCP, DVI, VGA, USB hub* • Display Port* • Height adjustable stand • Pivot* • ECO operation mode, ECO key and status LED • Ergonomic grey • TCO 5.0 • EPA 5.0 • Manageability • Windows® 7 certified 	<ul style="list-style-type: none"> • IPS wide viewing angle performance* • 0 Watt power save mode* • LED backlit* • HDMI*, DVI, VGA, USB hub* • Display Port* • Slim Enhanced height adjust stand • Auto Pivot* • ECO operation mode, ECO key and status LED* • Ergonomic grey • ABC sensor • TCO 5.0/03 • EPA 5.0* • Manageability • Windows® 7 certified

* Featured on selected models



A FEAST FOR YOUR EYES

FUJITSU DISPLAYS



	SUPERIOR			ADVANCED							ALL-ROUND				
Display	P27T-6 IPS	P24W-6 IPS	P23T-6 IPS	B24W-5 ECO	B23T-6 LED	B22W-6 LED	B22W-6 LED pG	B22W-5 ECO	B19-6 LED	B19-5 ECO	E23T-6 LED	E22W-6 LED	E19W-5	E19-6 LED	
Diagonal Size	68.6 cm (27-inch)	61 cm (24-inch)	58.4 cm (23-inch)	61 cm (24-inch)	58.4 cm (23-inch)	55.9 cm (22-inch)	55.9 cm (22-inch)	55.9 cm (22-inch)	48.3 cm (19-inch)	48.3 cm (19-inch)	58.4 cm (23-inch)	55.9 cm (22-inch)	48.1 cm (19-inch)	48.3 cm (19-inch)	
Panel and backlight	IPS/CCFL	IPS/CCFL	IPS/LED	TN/CCFL	TN/LED	TN/LED	TN/LED	TN/CCFL	TN/LED	TN/CCFL	TN/LED	TN/LED	TN/CCFL	TN/LED	
Aspect ratio	16:9	16:10	16:9	16:10	16:9	16:10	16:10	16:10	5:4	5:4	16:9	16:10	16:10	5:4	
Max. Resolution	2560 x 1440 pixel	1920 x 1200 pixel	1920 x 1080 pixel	1920 x 1200 pixel	1920 x 1080 pixel	1680 x 1050 pixel	1680 x 1050 pixel	1680 x 1050 pixel	1280 x 1024 pixel	1280 x 1024 pixel	1920 x 1080 pixel	1680 x 1050 pixel	1440 x 900 pixel	1280 x 1024 pixel	
Brightness - typical	350 cd/m ²	400 cd/m ²	250 cd/m ²	300 cd/m ²	250 cd/m ²	250 cd/m ²	250 cd/m ²	250 cd/m ²	250 cd/m ²	250 cd/m ²	250 cd/m ²	250 cd/m ²	300 cd/m ²	250 cd/m ²	
Contrast - typical	1000:1	1000:1	1000:1	1000:1	1000:1	1000:1	1000:1	1000:1	1000:1	1000:1	1000:1	1000:1	1000:1	1000:1	
Contrast - avanced	20,000:1	20,000:1	2,000,000:1	10,000:1	2,000,000:1	2,000,000:1	2,000,000:1	10,000:1	2,000,000:1		2,000,000:1	2,000,000:1	10,000:1	2,000,000:1	
Response time typ	6 ms (gtg)	5 ms (gtg)	5 ms (gtg)	5 ms	5 ms	5 ms	5 ms	5 ms	5 ms	5 ms	5 ms	5 ms	5 ms	5 ms	
Viewing angle (h/v) - typical	178°/178° CR10:1	178°/178° CR10:1	178°/178° CR10:1	170°/170° CR5:1	170°/170° CR5:1	170°/170° CR5:1	170°/170° CR5:1	170°/170° CR5:1	170°/170° CR5:1	170°/170°	170°/170° CR5:1	170°/170° CR5:1	170°/170°	170°/170° CR5:1	
Connectivity															
USB	4 x USB 2.0	4 x USB 2.0	4 x USB 2.0		4 x USB 2.0	4 x USB 2.0									
Video Input	1 x DisplayPort 2 x HDMI 1 x DualLink DVI 1 x D-SUB	1 x DisplayPort 1 x DVI (HDCP) 1 x D-SUB	1 x DisplayPort 1 x DVI (HDCP) 1 x D-SUB	1 x DVI (HDCP) 1 x D-SUB	1 x DisplayPort 1 x DVI (HDCP) 1 x D-SUB	1 x DisplayPort 1 x DVI (HDCP) 1 x D-SUB	1 x DVI (HDCP) 1 x D-SUB	1 x DVI (HDCP) 1 x D-SUB	1 x DVI (HDCP) 1 x D-SUB	1 x DVI (HDCP) 1 x D-SUB	1 x DVI 1 x D-SUB	1 x DVI (HDCP) 1 x D-SUB	1 x DVI (HDCP) 1 x D-SUB	1 x DVI (HDCP) 1 x D-SUB	1 x DVI (HDCP) 1 x D-SUB
Stand															
Rotation to portrait	90° (AutoPivot)	90° (AutoPivot)	90° (AutoPivot)		90°	90°	90°		90°	90°					
Height adjust range	125 mm	100 mm	120 mm	110 mm	120 mm	110 mm	110 mm	110 mm	110 mm	110 mm					
Swivel angle	340°	340°	340°	90°	340°	340°	340°	90°	340°	90°					
Tilt angle	-3° / +35°	-3° / +35°	-3° / +35°	-5° / +20°	-5° / +35°	-5° / +35°	-5° / +35°	-5° / +20°	-5° / +35°	-5° / +20°	-5° / +20°	-5° / +20°	-5° / +20°	-5° / +15°	
Picture over desk	55 mm (min)	50 mm (min)	50 mm (min)	70 mm (min)	50 mm	55 mm (min)	55 mm (min)	85 mm (min)	55 mm (min)	80 mm (min)					
Special Features															
0 watt mode	•	•	•												
ECO System	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
ABC	•	•	•												
Compliance															
Global	TCO'03 ISO9241-307 (Pixel fault class I)	TCO'03 ISO9241-307 (Pixel fault class I)	TCO Displays 5.0 ENERGY STAR® 5.0 EPEAT® in progress ISO9241-307 (Pixel fault class I)	TCO Displays 5.0 ENERGY STAR® 5.0 EPEAT® Silver ISO9241-307 (Pixel fault class I)	TCO Displays 5.0 ENERGY STAR® 5.0 EPEAT® in progress ISO9241-307 (Pixel fault class I)	TCO Displays 5.0 ENERGY STAR® 5.0 EPEAT® in progress ISO9241-307 (Pixel fault class I)	TCO Displays 5.0 ENERGY STAR® 5.0 EPEAT® in progress ISO9241-307 (Pixel fault class I)	TCO Displays 5.0 ENERGY STAR® 5.0 EPEAT® Silver ISO9241-307 (Pixel fault class I)	TCO Displays 5.0 ENERGY STAR® 5.0 EPEAT® in progress ISO9241-307 (Pixel fault class I)	TCO Displays 5.0 ENERGY STAR® 5.0 EPEAT® Silver ISO9241-307 (Pixel fault class I)	TCO Displays 5.0 ENERGY STAR® 5.0 EPEAT® in progress ISO9241-307 (Pixel fault class I)	TCO Displays 5.0 ENERGY STAR® 5.0 EPEAT® in progress ISO9241-307 (Pixel fault class I)	TCO Displays 5.0 EPEAT® Silver ENERGY STAR® 5.0 ISO9241-307 (Pixel fault class II)	TCO Displays 5.0 ENERGY STAR® 5.0 EPEAT® in progress ISO9241-307 (Pixel fault class I)	
Order information															
S26361-...	...K1372-V140	...K1371-V140	...K1370-V140	...K1334-V140	...K1388-V140	...K1375-V140	...K1392-V160	...K1320-V140	...K1374-V140	...K1318-V140	RUN:K1389-V160	RUN:K1377-V160	.RUN:K1331-V160	RUN:K1376-V160	
EAN (4049699...)	...293528	...293511	...293504	...111334	...350085	...310652	...361654	...064678	...310645	...064692	...350092	...393150	...109232	...393143	