




10pt touch open frame monitor with AG-coating and high brightness function

ProLite TF2234MC uses P-Cap Technology, built into an eye catching bezel with edge-to-edge glass. Featuring IPS LCD Screen technology, it offers exceptional colour performance and wide viewing angles. The higher brightness ensures crispy and clear image, even in bright environment. In addition to the superb image quality, the screen comes with an IP54 Rating, making it dust and water resistant, and with a rugged bezel making it suitable for demanding environments. The Anti Glare coating helps to avoid issues with reflections and external light sources affecting colour reproduction, contrast and sharpness. ProLite TF2234MC is the ideal screen for the kiosk integrators and a solution for Interactive Digital Signage, Instore Retail and Interactive Presentations.



IPS

IPS technology offers higher contrast, darker blacks and much better viewing angles than standard TN technology. The screen will look good no matter what angle you look at it.



TOUCH TECHNOLOGY - CAPACITIVE

This technology uses a sensor-grid of micro-fine wires integrated into the glass that covers the screen. Touch is detected because electrical characteristics of the sensor grid change when human finger is placed on the glass. Thanks to the glass overlay this technology is highly durable, and the touch function remains unaffected even if the glass is scratched. It offers perfect picture performance and will work with human finger (also latex gloved) and stylus-pen.

1. DISPLAY CHARACTERISTICS

ASPECT RATIO	16 : 9
PANEL	IPS LED, AG coated glass
NATIVE RESOLUTION	Full HD 1080p, 1920 x 1080 (2.1 megapixel)
BRIGHTNESS	350 cd/m ² typical
BRIGHTNESS	300 cd/m ² with touch panel
CONTRAST	1 000 : 1 with touch panel
RESPONSE TIME	8 ms
VIEWING ZONE	horizontal/vertical: 178° / 178° ; right/left: 89° / 89° ; up/down: 89° / 89°
DISPLAY COLOUR	16.7 million
TOUCHTECHNOLOGY	projective capacitive, multi touch (10 compatible touch points - HID, supported only under Windows® 7/8), activated by finger
TOUCH POINTS	10
GLASS THICKNESS	2.5 mm
GLASS HARDNESS	7H minimum
LIGHT TRANSMITTANCE	86%
DISPLAY AREA H X W	268.1 x 476.6 mm; 10.6" x 18.8"
PIXEL PITCH H X V	0.247 x 0.247 mm
HORIZONTAL SYNC	31.5 - 82.3 KHz
VERTICAL SYNC	56 - 75 Hz
SYNCHRONIZATION	Separate Sync
ANTI-GLARE COATING	yes

2. INTERFACES & CONNECTORS

ANALOG INPUT CONNECTOR	VGA
DIGITAL INPUT CONNECTOR	DVI
CONTROLS	USB (touch)

3. FEATURES

PLUG & PLAY	VESA DDC2B™
CONTROLS	On-Screen-Display in 7 languages (DE, EN, ES, FR, IT, JP, Chinese - traditional and simplified) and 5 front controls (Menu, Scroll up/ Brightness, Scroll down/ Contrast, Select/ Auto, Power)
USER CONTROLS	contrast, brightness, auto adjust, H.position, V.position, H.size, phase, OSD H.position, OSD V.position, OSD timeout, reset, input select, OSD language, colour temperature
REGULATIONS	CE, TÜV-Bauart, cULus, CU, VCCI
VESA MOUNTING	100 x 100 mm
COLOUR	Black
ORIENTATION	Face-up / portrait / Landscape
WATER AND DUST PROTECTION	IP65

4. ACCESSORIES


DRIVER	multi-touch: Windows7/8 (HID compliant), single-touch: Vista, XP, 9X, 2000, CE, NT4, Linux, Mac (OSX)
INCLUDED ACCESSORIES	AC adapter, power cable, VGA signal cable, DVI signal cable, USB cable, Touch Panel Driver Disk (CD-ROM), brackets, quick start guide, safety guide, L-brackets
OPTIONAL ACCESSORIES	remote control touchV01

5. POWER MANAGEMENT

POWER SUPPLY	DC 12V
POWER SUPPLY UNIT	external
POWER USAGE	27 W typical; max. 2 W in Power management mode
POWER MANAGEMENT	VESA DPMS

6. DIMENSIONS & WEIGHT

DIMENSIONS W X H X D	517.5 x 313.5 x 46 mm
WEIGHT	4.4 kg

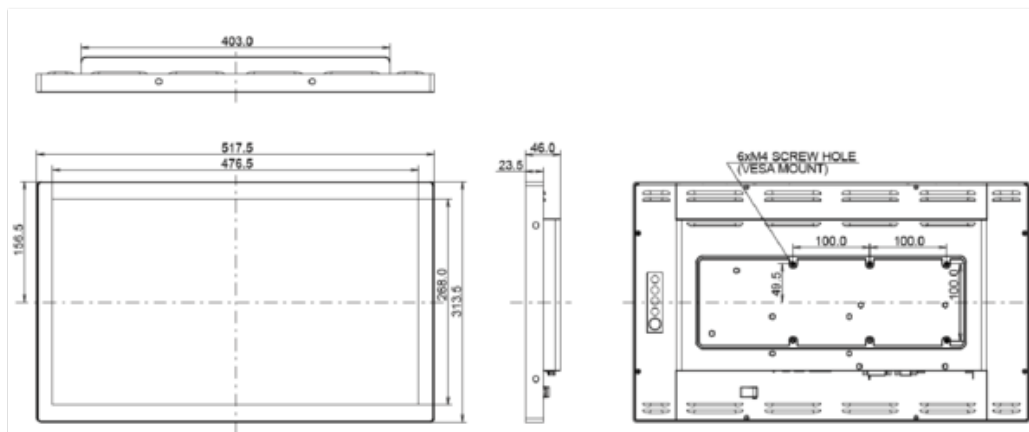

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION (). ALL RIGHTS RESERVED.