



[→ Product Website](#)

The FDF2382WT-A offers the highest picture quality in 16:9 format on a diagonal of 23". The impressive viewing angle of the IPS LCD module is particularly striking. The undistorted viewing from all angles is optimal for the widescreen format and touch operation, as all controls and information are equally visible. The FDF2382WT-A recognises up to 10 simultaneous touches and allows smooth and accurate stylus input. It ignores incorrect input, for example, from the palm of the hand.


- ✓ 23" touch monitor with 16:9 format and Full HD resolution
- ✓ Multi-touch operation (for example, zooming, scrolling, rotating, shifting)
- ✓ Smooth and accurate pen input with palm recognition
- ✓ Brightness 260 cd/m<sup>2</sup>, contrast 1000:1
- ✓ IPS LCD module with wide viewing angles
- ✓ Flicker-free image reproduction
- ✓ DisplayPort, HDMI and D-Sub input for digital and analogue connection

## Image quality

### Precise, high-contrast, bright and crisp screen


#### Maximum image quality thanks to the IPS panel

The monitor is capable of all three key elements of excellent image quality: excellent resolution of 1920 x 1080 (Full HD) pixels, maximum contrast of 1000:1, and stable brightness of up to 260 cd/m<sup>2</sup>. That means you will experience razor-sharp text contours, brilliant graphics, and clear images. Thanks to the high-quality IPS panels with LED backlight, contrasts and colours remain stable from every viewing angle.

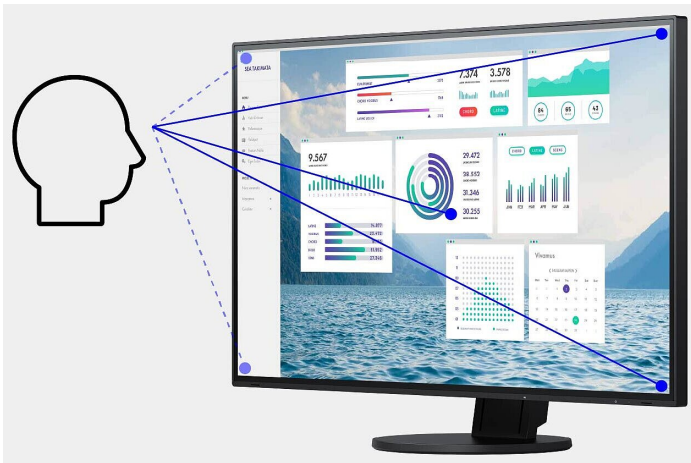


#### Precise color control

An image can only be perfect if the colours are, too. This is why EIZO monitors have a 10-bit look-up table at a minimum, which allows the colour information to be assigned much more precisely than with conventional 8-bit LUTs. The finest colour gradations ensure that gradients are always perfectly displayed, while also offering customised adjustment options. For example, you can adjust the white balance from 4000 K to 10 000 K in 500-K intervals.



Look-Up-Table with 10 and more bit



Look-Up-Table with 8 bit

#### FOR THE SAKE OF THE EYES

#### Flicker free

The monitor is flicker-free at every brightness setting. This is great for users, as their eyes will not tire as quickly, allowing them to work in front of the screen for longer periods of time without fatigue.

#### Overdrive to quickly change images

Fast, faster, overdrive. The overdrive function accelerates switching time so that the gray-gray change takes only 11 ms on average. You can watch films and rapidly changing images without annoying afterglow.

## Touch functionality

### Operation with finger or touch-pen

#### Fine, precise stylus input

The FDF2382WT-A contains reliable capacitive touch technology (PCAP) that detects movements with very high precision. Hence you can easily capture even small writing and character input via the screen.



## Frameless touchscreen


The display extends right up to the bezels – this means that the entire touch surface can be used without disruptions right up to the edges, which is particularly convenient for swiping and scrolling motions.



## Multi-touch screen with robust surface

The monitor can detect up to ten simultaneous touches, which means that multiple individuals can operate the monitor at the same time. Furthermore, the touchscreen is equipped with hand ball recognition. While writing, users can place their hands or arms on the monitor without accidentally triggering an input.

With a hardness of 5H, the glass surface is insensitive to scratches and guarantees to recognize up to 50 million touches.

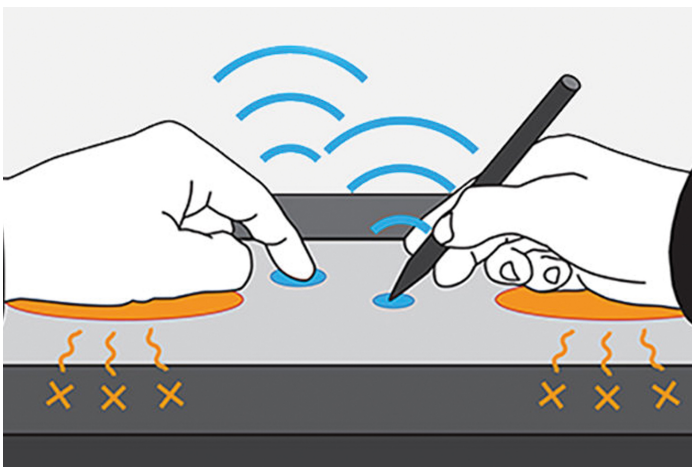

## Touch detection and sensitivity

The monitor is equipped with technology that calibrates the touch sensitivity to minimise incorrect touch response due to environmental factors and electromagnetic noise. This ensures that the screen maintains accurate touch interaction during use.

Users can easily turn touch detection on or off by pushing the button conveniently located on the monitor's outer rim. A button is located on two sides of the monitor for easy access.



## Touch operation without additional drivers

The multitouch interface is supported by standard Windows 11, 10 and 8.1 drivers. You can operate the touch panel without additional drivers by simply connecting the USB cable.


In addition to Windows standard touch drivers, a dedicated touch driver is also available to support touch interaction sounds and mouse emulation.

## Easy to use

### Features for greater comfort


#### Preset color modes: optimized display at the touch of a button

Preset color modes make it easier for you to work and view images, texts and videos. This is because when choosing color settings, it makes a difference whether you are looking at a film, editing an image, surfing the Internet or writing texts. You can configure the respective default settings for brightness, gamma correction and colour temperature at the press of a button.

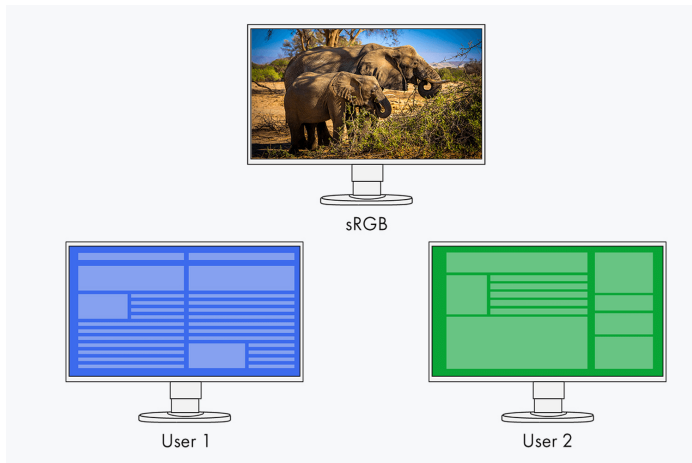

#### Reclining stand

The equipped stand provides flexible positioning to allow the monitor to rest on your desk like a laptop and recline back to your desired angle. This makes it easy to place the monitor in the ideal position for comfortable use in any environment.

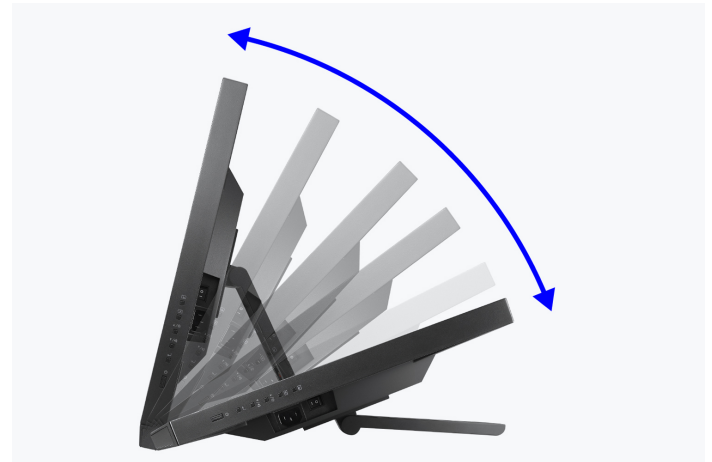

Tilt by moving the base: 15° - 70°

## Variety of ports

### Best connectivity

#### One monitor, many ports

It couldn't be easier: Most end devices, such as PC, laptop, mouse, keyboard or headphones, can be connected directly to the monitor, thanks to its wide range of signal interfaces and ports. This makes your daily work easier and ensures a tidy desk.



## Durability And reliability

### Three-year warranty

EIZO grants a three-year warranty. This is possible thanks to the highly developed production process based on a simple principle of success: sophisticated and innovative technology, made from high-end materials.

### 24/7 use

The FDF2382WT-A is built for 24-hour use and is characterised by maximum reliability.



## Sustainability Environmentally and socially conscious production

### Zero-watt consumption thanks to the power switch

The monitors have an integrated mechanical power switch, which is extremely practical and energy-saving: If you switch off the monitor using the power switch, the device will stop consuming any power at all. Moreover, it consumes a maximum of 0.5 watt in standby mode.

## Socially responsible production

The FDF2382WT-A is produced in a socially responsible way. It is free of child labour and forced labour. Suppliers along the supply chain have been carefully selected and they have also committed themselves to produce in a socially responsible way. This applies in particular to conflict minerals. We present a detailed report about our social responsibility annually and voluntarily.



## Environmentally and climate friendly

Each FDF2382WT-A is manufactured in our own factory, which implements an environmental management system in accordance with ISO 14001. This includes measures to reduce waste, wastewater and emissions, resource and energy consumption, as well as to encourage environmentally conscious behaviour among employees. We publicly report on these measures on an annual basis.



## **Sustainable and durable**

The FDF2382WT-A is designed to have a long service life and normally outlasts the warranty period by some distance. Replacement parts are available many years after production has ceased. The entire lifecycle takes into account the impact on the environment as the longevity of the product and the fact it can be repaired saves resources and protects the environment. When designing the FDF2382WT-A, we took a minimalistic approach to our resources by using high-quality components and materials, as well as a careful production process.



## Technical Data

GENERAL		FEATURES & OPERATION	
Item no.	FDF2382WT-A	Preset color/greyscale modes	2x manual memory locations, sRGB
Case color	Black	HDCP Decoder	✓
Areas of application	Office, Video surveillance, Industry	Automatic signal input recognition	✓
Product line	DuraVision	Built-in speakers	✓
Areas of application	Touch and video monitors, Automation, Video surveillance, Large and medium-sized companies, Private user & small business, Control rooms	On-screen menu languages	de, en, fr, es, it, se
EAN	4995047063216	Adjustment options	Color Mode, Brightness, Contrast, Color temperature /White point, Gamma, Overdrive, Colour tone, Color saturation, Resolution, Scaling, Touch function On/Off, OSD language, Signal input, Volume, Key lock
SCREEN		Integrated power unit	✓
Screen size [in inches]	23	Touchscreen	✓
Screen size [in cm]	58	Touch panel type	Projected capacitive (PCAP)
Format	16:9	Touch compatible OS	Windows 8.1 (64-bit/32-bit), Windows 11, Windows 10
Viewable image size (width x height) [in mm]	509,2 x 286,4	Touch points	10
Ideal and recommended resolution	1920 x 1080 (Full HD)	ELECTRICAL DATA	
Pixel pitch [in mm]	0,265 x 0,265	Frequency	D-Sub: 31-81 kHz/55-76 Hz; Display Port: 31-68 kHz/59-61 Hz; HDMI: 31-68 kHz/59-61 Hz
Supported resolutions	1920 x 1080 (Full HD), 1680 x 1050, 1280 x 1024, 1024 x 768, 800 x 600, 720 x 400, 640 x 480	Power consumption (typical) [in watts]	12
Panel technology	IPS	Maximum Power Consumption [in watts]	47 (at maximum brightness with all signal inputs and USB ports in use)
Max. viewing angle horizontal	178	Max. Power consumption in stand-by mode [in watts]	0.5
Max. viewing angle vertical	178	Power consumption with power switch off [in watts]	0
Number of colors or greyscale	16.7 million colors (D-Sub, 8 Bit), 16.7 million colors (DisplayPort, 8 Bit), 16.7 million colors (HDMI, 8 Bit)	Energy efficiency class	E
Color palette/look-up table	1.06 billion color tones / 10 Bit	Energy consumption/1000h [in kWh]	17
Max. color space (typical)	sRGB (100%)	Power supply	AC 100-240V, 50/60Hz
Max. brightness (typical) [in cd/m <sup>2</sup> ]	260	DIMENSIONS & WEIGHT	
Max. dark room contrast (typical)	1000:1	Dimensions (incl. stand) (width x height x depth) [in mm]	556,7 x 144,9-353,9 x 216,3-401,3
Response time grey-grey alternation (typical) [in ms]	11	Weight (incl. stand) [in kg]	6.6
Max. refresh rate [in Hz]	60	Dimensions (without stand) (width x height x depth) [in mm]	556,7 x 339,2 x 54
Backlight	LED	Weight (without stand) [in kg]	6
CONNECTIONS		Dimension drawing (PDF)	<a href="#">Dimension drawing (PDF)</a>
Touch port	USB	Tiltability	15 / 70
Signal inputs	D-Sub, DisplayPort (HDCP 1.3), HDMI (HDCP 1.4)	Hole spacing	100 x 100
USB specification	USB 5Gbps (USB 3)	CERTIFICATION & STANDARDS	
USB upstream ports	1 x type B	Operating temperature	5 - 35 °C / 20 - 80 % (R.H., non condensing)
USB downstream ports	2x type A	Certification	CE, UKCA, CB, RCM, cTÜVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, RoHS, WEEE, China RoHS, CCC
Graphic signal	RGB Analog, DisplayPort, HDMI (RGB, YUV)	SOFTWARE & ACCESSORIES	
Control port	USB-Protocol	Other box contents	Signal cable HDMI - HDMI, USB cable (Type A - Type B), Signal cable DisplayPort - DisplayPort, Power cord, Quick guide
Sync formats	Separate	Accessories	PM200-K, CP200, PP100-K, TP5
Audio input	3.5 mm stereo jack, DisplayPort, HDMI		
WARRANTY			
Warranty periode	3 years		



# DuraVision **FDF2382WT-A**

Find your EIZO contact:  
EIZO Europe GmbH  
Belgrader Straße 2  
41069 Mönchengladbach  
Phone: +49 2161 8210-0  
[www.eizo.eu](http://www.eizo.eu)

All product names are trademarks or registered trademarks of EIZO Corporation in Japan and other countries or their respective companies. Copyright © 2023 EIZO Europe GmbH, Belgrader Str. 2, 41069 Mönchengladbach, Germany. All rights, errors and modifications reserved. Latest update: 19.11.2023