


A Feast for Your Eyes

FUJITSU Displays

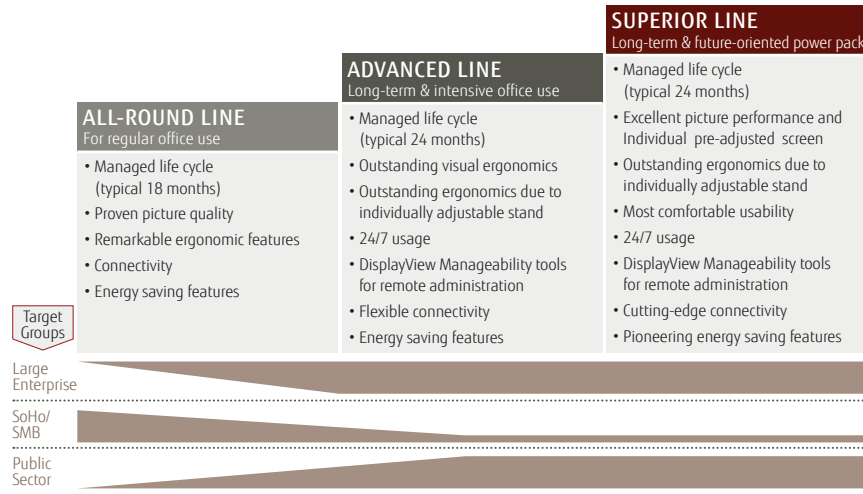

ALL-ROUND LINE

For regular office use

- Managed life cycle (typical 18 months)
- Proven picture quality
- Remarkable ergonomic features
- Connectivity
- Energy saving features

ADVANCED LINE

Long-term & intensive office use

- Managed life cycle (typical 24 months)
- Outstanding visual ergonomics
- Outstanding ergonomics due to individually adjustable stand
- 24/7 usage
- DisplayView Manageability tools for remote administration
- Flexible connectivity
- Energy saving features

SUPERIOR LINE

Long-term & future-oriented power pack

- Managed life cycle (typical 24 months)
- Excellent picture performance and Individual pre-adjusted screen
- Outstanding ergonomics due to individually adjustable stand
- Most comfortable usability
- 24/7 usage
- DisplayView Manageability tools for remote administration
- Cutting-edge connectivity
- Pioneering energy saving features

Target Groups

Large Enterprise

SoHo/SMB

Public Sector

WIDE VIEWING ANGLE TECHNOLOGY

- Ultra-wide viewing angle and brilliant view from any perspective
- Improved visual ergonomics

PATENT-APPLIED PRESENCE SENSOR

- For both: energy saving and computer security
- Locks the computer and sets display and computer into power saving mode while the user is not present

EXCELLENT RESOLUTION

- Ultra High Definition (UHD, also known as 4k)
- For razor-sharp pictures displaying all details

PIP AND PBP

- Picture in Picture (PiP) and Picture by Picture (PbP) function allows displaying content from 2 sources on one screen simultaneously

0-WATT

- FUJITSU P Line* offers 0-Watt power consumption in off/mode (VGA, DVI and HDMI)
- Unique and patented technology

ECO SYSTEM

- Eco mode for power saving potential
- Eco Key* to activate the Eco mode by one key stroke
- Control LED* in 3 colors for the three levels of the mode

ABC – AUTOMATIC BRIGHTNESS CONTROL

- Sensor for automatic dimming saves energy and reduces eye strain
- Visual ergonomics for the eyes due to an always optimized contrast between screen content and background around the display

ERGO KEYS / SENSORS

- Easy access to the 6 + 1 OSD keys
- Simplified usage of the menu with 2 additional keys

SMARTPHONE CONNECTION VIA MHL*

- With FUJITSU P Line (except P27T-7 LED) MHL
- Connectivity for smartphones and tablets

ALL-ROUND

Energy Saving



FUJITSU Display E Line
24 / 21.5 and 19.5-inch wide / 19-inch

- HDMI*, HDCP, DVI, VGA
- ECO operation mode
- Matt black
- TCO 6.0, EPA 6.0
- Built-in speaker and headphone connector
- Touch Screen**
- 10-finger touch functionality** with anti-glare screen surface
- 4x USB 3.0*
- Energy Efficiency Class: A (min.)

ADVANCED

Ergonomics



FUJITSU Display B Line proGREEN
24 / 22 and 20-inch wide

- Ergonomic design
- DVI (HDCP), HDMI*, VGA, USB hub*
- Best in class height adjust stand
- Pivot
- ECO operation mode, ECO key and status LED*
- Matt black perfect to match the proGREEN selection family
- TCO 6.0, EPA 6.0
- Manageability*
- Energy Efficiency Class: A (min.)



FUJITSU Display B Line
27 / 24 / 23 / 22 wide and 19-inch

- Ergonomic design
- Wide viewing angle technology*
- DisplayPort*, DVI-D (HDCP), VGA, USB 2.0 hub*
- Best in class height adjust stand
- Pivot
- ECO operation mode, ECO key and status LED
- Ergonomic grey for visual ergonomics
- TCO 6.0, EPA 6.0 Built-in speaker and headphone connector
- Energy Efficiency Class: A+

SUPERIOR

Graphics Performance Needs



FUJITSU Display P Line
27 and 24 wide

- Wide viewing angle performance
- Presence sensor*, call & status indicator*
- 0-Watt power save mode*
- UHD*/4K*, PiP*, PbP*
- DisplayPort, DualLink DVI*, HDMI w/ MHL*, HDMI, DVI, VGA, USB 3.0
- Best in class height adjust stand
- 90° rotation, Auto Pivot*
- ECO operation mode, ECO key and status LED
- Auto Brightness Control*(ABC) sensor
- DICOM compatible adjust
- Manageability
- Energy Efficiency Class: A (min.)



* Featured on selected models ** Featured on E22 Touch



Do you need maintenance and service support?

» <http://www.fujitsu.com/fts/servicepositioning>

Are you looking for contact details?

» Website: <http://www.fujitsu.com/fts/displays>

» Email: ccd.info@ts.fujitsu.com

» Partner: <http://partners.ts.fujitsu.com/displays>

A Feast for Your Eyes

FUJITSU Display



	SUPERIOR				ADVANCED							
FUJITSU Display	P27T-7 UHD	P27T-7 LED	P24W-7 LED	P24T-7 LED	B27T-7 LED	B24W-7 LED	B24T-8 TE Pro	B24T-7 LED	B23T-7 LED	B22W-7 LED	B19-7 LED	
Diagonal Size	68.5 cm (27-inch)	68.5 cm (27-inch)	61 cm (24-inch)	61 cm (24-inch)	68.5 cm (27-inch)	61 cm (24-inch)	60.5 cm (23.8-inch)	61 cm (24-inch)	58.4 cm (23-inch)	55.9 cm (22-inch)	48.3 cm (19-inch)	
Panel and backlit	IPS/LED	IPS/LED	Wide Viewing/LED	Wide Viewing/LED	Wide Viewing/LED	Wide Viewing/LED	Wide Viewing/LED	TN/LED	Wide Viewing/LED	TN/LED	IPS/LED	
Aspect ratio	16:9	16:9	16:10	16:9	16:9	16:10	16:9	16:9	16:9	16:10	5:4	
Max. Resolution	3,840x2,160 pixels	2,560x1,440 pixels	1,920x1,200 pixels	1,920x1,080 pixels	1,920x1,080 pixels	1,920x1,200 pixels	1,920x1,080 pixels	1,920x1,080 pixels	1,920x1,080 pixels	1,680x1,050 pixels	1,280x1,024 pixels	
Brightness - typical	350 cd/m ²	350 cd/m ²	300 cd/m ²	250 cd/m ²	300 cd/m ²	300 cd/m ²	250 cd/m ²	250 cd/m ²	300 cd/m ²	250 cd/m ²	250 cd/m ²	
Contrast - typical	1,000:1	1,000:1	1,000:1	3,000:1	1,000:1	1,000:1	1,000:1	1,000:1	1,000:1	1,000:1	1,000:1	
Contrast - advanced	20,000,000:1	20,000,000:1	20,000,000:1	20,000,000:1	20,000,000:1	20,000,000:1	20,000,000:1	20,000,000:1	20,000,000:1	20,000,000:1	2,000,000:1	
Response time - typical /gtg	5 ms (in Video mode)	5 ms (in Video mode)	5 ms (in video mode) (gtg)	5 ms (in Video mode)	5 ms (in Video mode)	5 ms (in Video mode)	5 ms (in Video mode)	5 ms (in Video mode)	5 ms (in Video mode)	5 ms (in Video mode)	5 ms (in Video mode)	
Viewing angle	178°/178° CR10:1	178°/178° CR10:1	178°/178° CR10:1	178°/178° CR10:1	178°/178° CR10:1	178°/178° CR10:1	178°/178° CR10:1	176°/170° CR5:1	178°/178° CR10:1	170°/170° CR5:1	178°/178° CR10:1	
Connectivity												
USB	2 x USB 3.0 Always available USB	4 x USB 3.0 Always available USB	4 x USB 3.0 Always available USB	3 x USB 3.0 Always available USB	4 x USB 2.0 Always available USB	2 x USB 2.0 Always available USB	2 x USB 2.0	4 x USB 2.0	2 x USB 2.0 Always available USB	4 x USB 2.0 Always available USB	---	
Video Input	1 x DisplayPort 1.2 1 x Mini DisplayPort 1 x HDMI 2.0 2 x HDMI w/ MHL support	1 x DisplayPort 1.2 1 x HDMI 1.4 1 x DualLink DVI 1 x D-SUB	1 x DisplayPort 1.2 1 x HDMI 1.4 with MHL 2.0 support 1 x DVI (HDCP) 1 x D-SUB	1 x DisplayPort 1.2 1 x HDMI 1.4 with MHL 2.0 support 1 x DVI (HDCP) 1 x D-SUB	1 x DisplayPort 1 x DVI (HDCP) 1 x D-SUB	1 x DisplayPort 1.2 1 x DVI (HDCP) 1 x D-SUB	1 x DisplayPort 1 x DVI (HDCP) 1 x D-SUB	1 x DisplayPort 1 x DVI 1 x D-SUB	1 x DisplayPort 1.2 1 x DVI (HDCP) 1 x D-SUB	1 x DisplayPort 1 x DVI (HDCP) 1 x D-SUB	1 x DVI (HDCP) 1 x D-SUB	
Stand												
Rotation to portrait	90° (Pivot)	90° (AutoPivot)	90° (AutoPivot)	90° (AutoPivot)	90°	90°	90°	90°	90°	90°	90°	
Height adjust range	130 mm	130 mm	130 mm	130 mm	130 mm	130 mm	150 mm	130 mm	130 mm	130 mm	130 mm	
Swivel angle	340°	340°	340°	340°	340°	340°	340°	340°	340°	340°	340°	
Tilt angle	-5° / +35°	-5° / +35°	-5° / +35°	-5° / +35°	-5° / +35°	-5° / +35°	-5° / +35°	-5° / +35°	-5° / +35°	-5° / +35°	-5° / +35°	
Picture over desk	45 mm	45 mm	45 mm	45 mm	45 mm	45 mm	40 mm	45 mm	45 mm	50 mm	45 mm	
Special features												
Presence sensor / call & status indicator			yes / no	yes / yes								
0-Watt in standby		yes	yes									
Eco System	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	
ABC		yes	yes	yes								
Compliance												
Global	Energy Efficiency Class: A+, TCO Displays 6.0 ENERGY STAR® 6.0 EPEAT® Gold (dedicated regions) ISO9241-307 (Pixel fault class I)	Energy Efficiency Class: A, TCO Displays 6.0 ENERGY STAR® 6.0 EPEAT® Gold (dedicated regions) ISO9241-307 (Pixel fault class I)	Energy Efficiency Class: A+, TCO Displays 6.0 ENERGY STAR® 6.0 EPEAT® Gold (dedicated regions) ISO9241-307 (Pixel fault class I)	Energy Efficiency Class: A, TCO Edge, TCO Displays 6.0 ENERGY STAR® 6.0 EPEAT® Gold (dedicated regions) ISO9241-307 (Pixel fault class I)	Energy Efficiency Class: A+, TCO Displays 6.0 ENERGY STAR® 6.0 EPEAT® Gold (dedicated regions) ISO9241-307 (Pixel fault class I)	Energy Efficiency Class: A+, TCO Displays 6.0 ENERGY STAR® 6.0 EPEAT® Gold (dedicated regions) ISO9241-307 (Pixel fault class I)	Energy Efficiency Class: A+, TCO Displays 6.0 ENERGY STAR® 6.0 EPEAT® Gold (dedicated regions) ISO9241-307 (Pixel fault class I)	Energy Efficiency Class: A+, TCO Displays 6.0 ENERGY STAR® 6.0 EPEAT® Gold (dedicated regions) ISO9241-307 (Pixel fault class I)	Energy Efficiency Class: A+, TCO Displays 6.0 ENERGY STAR® 6.0 EPEAT® Gold (dedicated regions) ISO9241-307 (Pixel fault class I)	Energy Efficiency Class: A+, TCO Displays 6.0 ENERGY STAR® 6.0 EPEAT® Gold (dedicated regions) ISO9241-307 (Pixel fault class I)	Energy Efficiency Class: A+, TCO Displays 6.0 ENERGY STAR® 6.0 EPEAT® Gold (dedicated regions) ISO9241-307 (Pixel fault class I)	
Order Information												
S26361-...	...-K1564-V140	...-K1442-V140	...-K1498-V140	...-K1543-V140	...-K1478-V141	...-K1497-V140	...-K1577-V140	...-K1454-V140	...-K1496-V140	...-K1472-V140	...-K1471-V140	

A Feast for Your Eyes

FUJITSU Displays



	ADVANCED					ALL-ROUND				
FUJITSU Display	B24-8 TS Pro	B24T-7 LED proGREEN	B22T-7 Pro	B20T-7 LED proGREEN	B24T-1L	E24T-7 Pro	E22T-7 Pro	E20T-7 LED	E19-7 LED	E22 Touch
Diagonal Size	60.5 cm (23.8-inch)	61 cm (24-inch)	54.6 cm (21.5-inch)	49.5 cm (19.5-inch)	61 cm (24-inch)	61 cm (24-inch)	54.6 cm (21.5-inch)	49.5 cm (19.5-inch)	48.3 cm (19-inch)	54.6 cm (21.5-inch)
Panel and backlight	Wide Viewing/LED	TN/LED	Wide Viewing/LED	TN/LED	TN/LED	Wide Viewing/LED	Wide Viewing/LED	TN/LED	IPS/LED	Wide Viewing/LED
Aspect ratio	16:9	16:9	16:9	16:9	16:9	16:9	16:9	16:9	5:4	16:10
Max. Resolution	1,920x1,080 pixels	1,920x1,080 pixels	1,920x1,080 pixels	1,600x900 pixels	1,920x1,080 pixels	1,920x1,080 pixels	1,920x1,080 pixels	1,600 x 900 pixels	1,280 x 1,024 pixels	1,920 x 1,080 pixels
Brightness - typical	250 cd/m ²	250 cd/m ²	250 cd/m ²	250 cd/m ²	250 cd/m ²	250 d/m ²	250 d/m ²	250 cd/m ²	250 cd/m ²	240 cd/m ² with touch sensor
Contrast - typical	1,000:1	1,000:1	3,000:1	1,000:1	1,000:1	1,000:1	3,000:1	1,000:1	1,000:1	1,000:1
Contrast - advanced	20,000,000:1	20,000,000:1	20,000,000:1	20,000,000:1	20,000,000:1	20,000,000:1	20,000,000:1	20,000,000:1	2,000,000:1	5,000,000:1
Response time - typical/gtg	5 ms (in Video mode)	5 ms (in Video mode)	5 ms (in Video mode)	5 ms (in Video mode)	5 ms (in Video mode)	5 ms (in Video mode)	5 ms (in Video mode)	5 ms (in Video mode) s	8 ms (in Video mode)	7 ms (in Video mode)
Viewing angle (h/v) - typical	178°/178° CR10:1	176°/170°	178°/178° CR10:1	176°/170° CR5:1	170°/160° CR10:1	178°/178°	178°/178° CR10:1	176°/170°	178°/178° CR10:1	178°/178° CR10:1
Connectivity										
USB	2xUSB 2.0	4xUSB 2.0 Always available USB	4xUSB 2.0 Always available USB							4 x USB 3.0
Video Input	1 xHDMI 1 xDVI-D (HDCP) 1 xD-SUB	1 xHDMI 1 xDVI-D 1 xD-SUB	1 xHDMI 1 xDVI-D (HDCP) 1 xD-SUB	1 xDVI (HDCP) 1 xD-SUB	1 x HDMI 1 xDVI (HDCP) 1 xD-SUB	1 xHDMI 1 xDVI-D (HDCP) 1 xD-SUB	1 xHDMI 1 xDVI-D (HDCP) 1 xD-SUB	1 xDVI-D (HDCP) 1 xD-SUB	1 xDVI (HDCP) 1 xD-SUB	1 xHDMI 1 xDVI-D (HDCP) 1 xD-SUB
Stand										
Rotation to portrait	90°	90°	90°	90°	90°					
Height adjust range	150 mm	130 mm	130 mm	130 mm	130 mm					
Swivel angle	340°	340°	340°	320°	320°					
Tilt angle	-5° / +35°	-5° / +35°	-5° / +35°	-5° / +22°	-5° / +22°	-3.5° / +21.5°	-5° / +20°	-3.5° / +21°	-5° / +20°	12° - 60°
Picture over desk	40 mm	45 mm	50 mm	99 mm	95 mm					
Special features										
Presence Sensor										
0-Watt in standby										
Eco System (mode, key & LED)	yes	yes	yes			(Eco mode)	yes	(Eco mode)	yes	
ABC										
Compliance										
Global	Energy Efficiency Class: A+, TCO Displays 6.0 ENERGY STAR® 6.0 EPEAT® Gold (dedicated regions) ISO9241-307 (Pixel fault class I)	Energy Efficiency Class: A+, TCO Displays 6.0 ENERGY STAR® 6.0 EPEAT® Gold (dedicated regions) ISO9241-307 (Pixel fault class I)	Energy Efficiency Class: A, TCO Displays 6.0 ENERGY STAR® 6.0 EPEAT® Gold (dedicated regions) ISO9241-307 (Pixel fault class I)	Energy Efficiency Class: A+, TCO Displays 6.0 ENERGY STAR® 6.0 EPEAT® Silver (dedicated regions) ISO9241-307 (Pixel fault class I)	Energy Efficiency Class: A+, TCO Displays 6.0 ENERGY STAR® 6.0 EPEAT® Silver (dedicated regions) ISO9241-307 (Pixel fault class I)	Energy Efficiency Class: A+, TCO Displays 6.0 ENERGY STAR® 6.0 EPEAT® Silver (dedicated regions) ISO9241-307 (Pixel fault class I)	Energy Efficiency Class: A, TCO Displays 6.0 ENERGY STAR® 6.0 EPEAT® Gold (dedicated regions) ISO9241-307 (Pixel fault class I)	Energy Efficiency Class: A, TCO Displays 6.0 ENERGY STAR® 6.0 EPEAT® Silver (dedicated regions) ISO9241-307 (Pixel fault class I)	Energy Efficiency Class: A, TCO Displays 6.0 ENERGY STAR® 6.0 EPEAT® in progress (dedicated regions) ISO9241-307 (Pixel fault class I)	Energy Efficiency Class: A, TCO Displays 6.0 ENERGY STAR® 6.0 ISO9241-307 (Pixel fault class I)
Order Information										
S26361-...	...-K1577-V160	...-K1454-V160	...-K1578-V160	...-K1542-V160	...-K1558-V160	...-K1573-V160	...-K1579-V160	...-K1538-V160	...-K1482-V160	...-K1544-V160