

24" (23.6" viewable) Full HD Monitor with SuperClear® MVA Panel Technology



Versatile Connectivity and Enhanced Viewing Comfort

VA2452Sm



Available for this model:
**Privacy Filter
Screen Protector**
VSPF2360
(Sold Separately)

If you're looking for a dependable work monitor at a great value, look no further than the ViewSonic® VA2452Sm. Designed with SuperClear MVA panel technology and a matte-finish uniform bezel, this 24" (23.6" viewable) monitor delivers an incredible front-of-screen experience at almost any viewing angle. And we didn't stop there, future-proof DisplayPort, as well as DVI and VGA inputs, provide productivity-boosting connectivity to PC systems, laptops, and other work devices. Our exclusive ViewMode™ feature lets you select the optimal screen setting for different applications, while Flicker-free and Blue Light filter technology minimizes eye fatigue so you can work for extended periods of time. Add dual speakers, and you have the ultimate multimedia experience.

Key Features:

- Full HD 1080p resolution
- Stunning color performance & wide-angle viewing
- Flexible connectivity options
- Superior color rendering & intuitive settings
- Enhanced viewing comfort

Designed for:

Business


24" (23.6" viewable) Full HD Monitor with SuperClear® MVA Panel Technology



VA2452Sm



Menu Controls

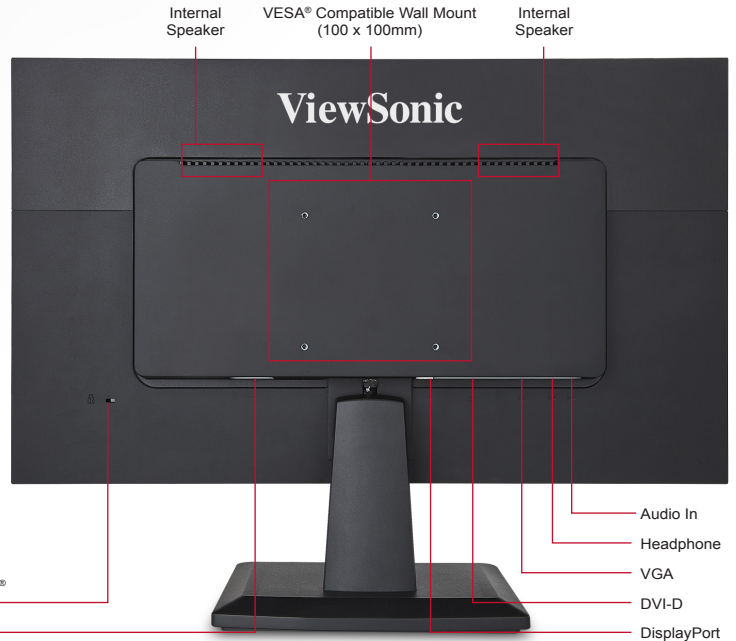

Kensington® Lock Slot
AC In

Internal Speaker VESA® Compatible Wall Mount (100 x 100mm) Internal Speaker

Audio In
Headphone
VGA
DVI-D
DisplayPort

Specifications

LCD PANEL	Type	Color a-Si TFT Active Matrix LCD
	Display Area	20.5" horizontal x 11.5" vertical; 23.6" diagonal
	Optimum Resolution	1920x1080
	Brightness	250 cd/m ² (typ.)
	Contrast Ratio	3,000:1 (typ.)
	Viewing Angles	178° horizontal, 178° vertical
	Colors	16.7M (6bit + Hi-FRC)
	Response Time	6.5ms (GTG)
	Backlight	White-light LED
	Backlight Life	40,000 hours (min.)
	Panel Surface	Anti-glare, hard-coating (3H)
VIDEO INPUT	Digital Frequency Sync	VGA, DVI-D, DisplayPort Fh: 24~82kHz, Fv: 50~75Hz Separate Sync
AUDIO OUTPUT	Speakers	1.5-watt (x2)
COMPATIBILITY	PC Mac®	Up to 1920x1080 non-interlaced Up to 1920x1080
CONNECTOR	Video In Audio In Headphone Power	VGA, DVI-D, DisplayPort 3.5mm mini jack 3.5mm mini jack 3-pin plug (CEE22)
CONTROLS	Front Panel Buttons OSD	Power, 1, Up, Down, 2 Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)

ERGONOMICS	Tilt	Forward 5° / Back 20°
POWER	Voltage Consumption Optimize Conserve	AC 100~240V (universal), 50 / 60Hz 23W (typ.) / 30W (max.) 19W (typ.) 15W (typ.)
OPERATING CONDITIONS	Temperature Humidity	32~104° F (0~40° C) 10~90% (non-condensing)
DIMENSIONS (W x H x D)	Physical with Stand Physical without Stand Packaging	22.2 x 16.6 x 7.7 in. / 517.7 x 399 x 196.8 mm 22.2 x 13.2 x 1.9 in. / 517.7 x 334.9 x 49.5 mm 22.5 x 15.2 x 4.9 in. / 571 x 386 x 124 mm
WEIGHT	Net with Stand Net without Stand Gross	8.6 lb. / 3.9 kg 7.8 lb. / 3.5 kg 11.1 lb. / 5.0 kg
WALL MOUNT	VESA compatible	100 x 100mm
REGULATIONS		CE, CB, RoHS, Reach, WEEE, TCO 6.0, Erp, WHQL Windows 8, Windows 7, cUL, ENERGY STAR, FCC-B, EPEAT Silver, Custom Union, UkrSEPRO, CCC, CEECP, CEL, BSMI, Green Mark, PSB, C-tick, GEMS
RECYCLE/DISPOSAL		Please dispose of in accordance with local, state, or federal laws
WARRANTY		Three-year limited warranty on parts, labor and backlight

Optional Accessories

Mini DisplayPort to DisplayPort Cable 6FT	CB-00010958
DVI-D to DVI-D Cable 6 Ft	CB-00008187
DisplayPort to DisplayPort Cable 30FT	CB-00010684
DisplayPort to DisplayPort Cable 6FT	CB-00010555
DisplayPort to DVI Adapter	LCD-CABLE-001
Desktop Display Wall Mount Kit	LCD-WMK-001

What's in the box?

VA2452Sm monitor, Power cable, VGA cable, Quick Start Guide

