

Philips Moda
LCD monitor with infinity
display

C Line

27" (68.6 cm)
Quad HD (2560 x 1440)

278C6QJSW



Expand beyond boundaries

with a full frameless display

The new Philips Moda display features crystal clear views in an award-winning frameless design. The four-sided edge-to-edge infinity display feels like a larger display. The QHD wide viewing angle display offers vivid colors and crisp text.

Immersive design

- 4-sided frameless display
- EasySelect menu toggle key for quick on-screen menu access

Brilliant performance

- Crystalclear images with Quad HD 2560x1440 pixels
- IPS LED wide view technology for image and color accuracy
- Less eye fatigue with Flicker-free technology
- SmartImage presets for easy optimized image settings
- SmartContrast for rich black details
- MultiView enables active dual connect and view at same time

Experience immersive multimedia

- MHL technology for enjoying mobile content on big screen
- DisplayPort connection for maximum visuals



PHILIPS

LCD monitor with infinity display
C Line 27" (68.6 cm), Quad HD (2560 x 1440)

278C6QJSW/93

Highlights

4-sided frameless



Eliminating the bezel on all 4-sides on this frameless edge-to-edge glass display gives a modern look and offers an expansive experience which makes the display actually feel larger.

EasySelect Menu Toggle Key




The discreetly placed EasySelect Menu Toggle Key allows you to make quick and easy adjustments to monitor settings in the On-Screen Display menu.

Crystalclear images

These latest Philips screens deliver Crystalclear, Quad HD 2560x1440 or 2560x1080 pixel images. Utilizing high performance panels with high density pixel count, enabled by high bandwidth sources like Displayport, HDMI, Dual link DVI, these new displays will make your images and graphics come alive. Whether you are demanding professional requiring extremely detailed information for CAD-CAM solutions, using 3D graphic applications or a financial wizard working on huge spreadsheets, Philips displays will give you Crystalclear images.

IPS technology

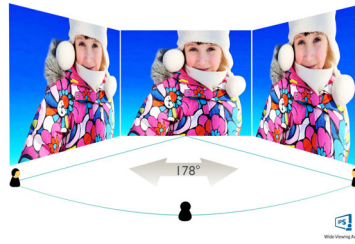


IPS displays use an advanced technology which gives you extra wide viewing angles of 178/178 degree, making it possible to view the display from almost any angle. Unlike standard TN panels, IPS displays gives you remarkably crisp images with vivid colors, making it ideal not only for Photos, movies and web browsing, but also for professional applications which demand color accuracy and consistent brightness at all times.

Flicker-free technology



Due to the way brightness is controlled on LED-backlit screens, some users experience flicker on their screen which causes eye fatigue. Philips Flicker-free Technology applies a new solution to regulate brightness and reduce flicker for more comfortable viewing.


SmartImage

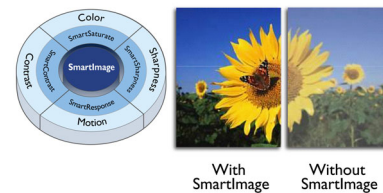

SmartImage is an exclusive leading edge Philips technology that analyzes the content displayed on your screen and gives you optimized display performance. This user friendly interface

allows you to select various modes like Office, Photo, Movie, Game, Economy etc., to fit the application in use. Based on the selection, SmartImage dynamically optimizes the contrast, color saturation and sharpness of images and videos for ultimate display performance. The Economy mode option offers you major power savings. All in real time with the press of a single button!

SmartContrast

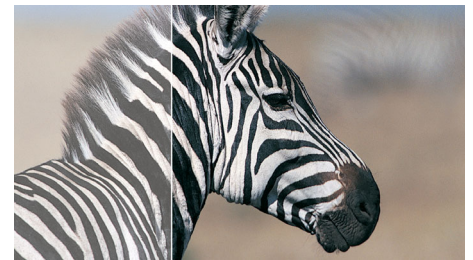

SmartContrast is a Philips technology that analyzes the contents you are displaying, automatically adjusting colors and controlling backlight intensity to dynamically enhance contrast for the best digital images and videos or when playing games where dark hues are displayed. When Economy mode is selected, contrast is adjusted and backlighting fine-tuned for just-right display of everyday office applications and lower power consumption.

MultiView technology

With the ultra high resolution Philips MultiView display you can now experience a world of connectivity in a comfortable way whether at office or at home. MultiView enables active dual connect and view so that you can work with multiple devices like PC and Notebook side-by-side simultaneously, making complex multi-tasking work a breeze. Watching live football feed from your set-top box on right side, while browsing the Internet from your notebook on the left is now easy. You may want to keep an eye on the live news feed with audio in the small window, while working on your latest blog.



**IF DESIGN AWARD
2016**

One of the world's first 4-sided frameless monitors
Expand beyond boundaries with a full

frameless display



4-sided Frameless



EasySelect



QHD
2560 x 1440



IPS
Wide Viewing
Angle



Flicker-free



20,000,000:1
SmartContrast



SmartImage™



MultiView



MHL
Mobile High-Definition Link

Specifications

Picture/Display

- LCD panel type: IPS technology
- Backlight type: W-LED system
- Panel Size: 27 inch / 68.6 cm
- Effective viewing area: 596.74 (H) x 335.66 (V)
- Aspect ratio: 16:9
- Optimum resolution: 2560 x 1440 @ 60 Hz
- Response time (typical): 5 ms (Gray to Gray)*
- Brightness: 350 cd/m²
- Contrast ratio (typical): 1000:1
- SmartContrast: 20,000,000:1
- Pixel pitch: 0.233 x 0.233 mm
- Viewing angle: 178° (H) / 178° (V), @ C/R > 10
- Flicker-free
- Picture enhancement: SmartImage
- Display colors: 16.7 M
- Scanning Frequency: 30 - 83 kHz (H) / 56 -75 Hz (V)
- MHL: 1920 x 1080p @ 30Hz
- sRGB

Connectivity

- Signal Input: VGA (Analog), MHL-HDMI (digital, HDCP), DisplayPort
- Sync Input: Separate Sync, Sync on Green
- Audio (In/Out): HDMI audio out

Convenience

- MultiView: 2x devices, PIP/PBP mode
- User convenience: Power On/Off, Menu, Multiview, Input, SmartImage
- OSD Languages: Brazil Portuguese, Czech, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Korean, Polish, Portuguese, Russian, Simplified Chinese, Spanish, Swedish, Traditional Chinese, Turkish, Ukrainian
- Other convenience: Kensington lock
- Plug & Play Compatibility: DDC/CI, Mac OS X, sRGB, Windows 10 / 8.1 / 8 / 7

Stand

- Tilt: -5/20 degree degree

Power

- On mode: 22.98 W (typ.) (EnergyStar 7.0 test method)
- Standby mode: 0.5 W (typ.)
- Off mode: 0.3 W (typ.)
- Power LED indicator: Operation - White, Standby mode- White (blinking)
- Power supply: External, 100-240VAC, 50-60Hz

Dimensions

- Product with stand (mm): 614 x 464 x 208 mm
- Product without stand (mm): 614 x 354 x 45 mm
- Packaging in mm (WxHxD): 686 x 546 x 250 mm

Weight

- Product with stand (kg): 7.18 kg
- Product without stand (kg): 4.00 kg
- Product with packaging (kg): 10.13 kg

Operating conditions

- Temperature range (operation): 0 to 40 °C
- Temperature range (storage): -20 to 60 °C
- Relative humidity: 20%-80 %
- Altitude: Operation: +12,000ft (3,658m), Non-operation: +40,000ft (12,192m)
- MTBF: 50,000 hrs (Excluding backlight) hour(s)

Sustainability

- Environmental and energy: EnergyStar 7.0, EPEAT Silver, RoHS, Lead-free, Mercury Free
- Recyclable packaging material: 100 %

Compliance and standards

- Regulatory Approvals: CE Mark, FCC Class B, TUV/ISO9241-307, WEEE, CCC, CECP, CU-EAC, RCM, TCO certified

Cabinet

- Color: White
- Finish: Glossy



Issue date 2016-04-27

Version: 1.0.1

12 NC: 8670 001 36693
EAN: 69 51613 91023 8

© 2016 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips N.V.
or their respective owners.

www.philips.com

* This Philips display is MHL certified. However, in case your MHL device does not connect or work correctly, check with your MHL device FAQ or vendor directly for direction. The policy of your device manufacturer may require you to purchase their brand specific MHL cable or adapter in order to work

* Requires optional MHL certified mobile device and MHL cable. (not included) Please check with your MHL device vendor for compatibility.

* Standby/Off energy saving of ErP is not applicable for the MHL charging functionality

* For complete list of MHL-enabled products refer to www.mhlconsortium.org

* "IPS" word mark / trademark and related patents on technologies belong to their respective owners.

* Response time value equal to SmartResponse