



LED DISPLAY

**VA2710-mh**


## Key Features

- SuperClear® IPS technology
- Narrow bezel
- HDMI and VGA inputs
- Dual integrated speakers
- ViewMode technology



## Product Description

The ViewSonic® VA10-mh is a Full HD monitor with IPS technology and flexible connectivity for use at home or in the office. With SuperClear® IPS Technology and Full HD resolution, images are clear and detailed from a wide range of viewing angles. The monitor's extensive connectivity options include HDMI and VGA inputs, allowing increased setup flexibility when connecting to other devices. The VA10-mh's narrow bezel design delivers a seamless viewing experience. Built-in dual integrated speakers make this monitor a complete multimedia package. It also comes equipped with Eye Care Technology to help eliminate eye strain caused by extended viewing periods. In addition, ViewSonic's exclusive ViewMode™ function offers a selection of intuitive presets to deliver optimised screen performance for various different applications. With an LED backlight and energy-saving Eco mode, the VA10-mh is an environmentally friendly display choice.

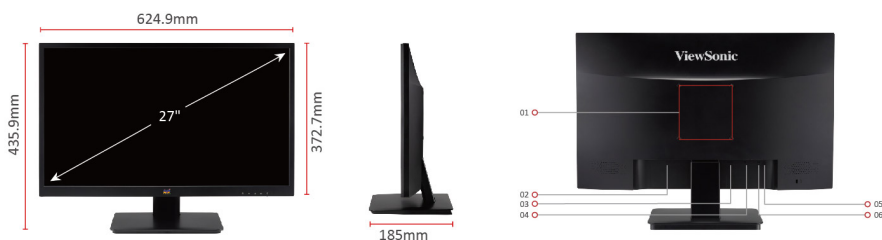

1. VESA Compatible(Wall Mount 100x100mm)
2. AC Power In
3. HDMI
4. VGA
5. Earphone
6. Audio In

**Visit Us** ■ [www.viewsonic.com](http://www.viewsonic.com)

**LCD PANEL**

Monitor Size:	27"W (27" Viewable)
Panel Technology:	IPS Technology TFT LCD
Resolution:	Full HD 1920 x 1080
Display Area:	597.888mm (H) x 336.312mm (V)
Aspect Ratio:	16:9
Brightness:	300 cd/m <sup>2</sup> (Typ)
Contrast Ratio:	1000:1 (Typ)
Dynamic Contrast Ratio:	50,000,000:1
Viewing Angles:	178 degrees / 178 degrees (Typ)
Response Time:	GtG: 5ms (typ)

**INPUT SIGNAL**

Frequency:	Fh = 24 ~ 82KHz ; Fv = 50 ~ 75Hz
Sync:	Separate Sync, TMDS

**COMPATIBILITY**

PC:	Windows 7, Windows 8, Windows 8.1, Windows 10 certified
Mac®:	Power Mac tested

**CONNECTOR**

Input:	VGA x 1, HDMI x 1 (v1.4 compatible)
Output:	Earphone out x 1 (3.5mm plug)

**AUDIO**

Speaker:	2W x 2
----------	--------

**POWER**

Power:	3-pin plug (CEE22) x 1
Voltage:	AC 100-240V (Universal); 50/60Hz

**ERGONOMICS**

Tilt:	20 ~ -5 degrees
-------	-----------------

**WALL MOUNT**

VESA®:	100mm x 100mm
--------	---------------

**OPERATING CONDITIONS**

Temperature (° F / ° C):	32°F to 104°F (0°C to 40°C)
Humidity:	20% to 90% (no condensation)

**DIMENSIONS (W X H X D) (MM)**

Physical with stand (mm):	624.9mm (W) x 435.9mm (H) x 185mm (D)
Physical without stand (mm):	624.9mm (W) x 372.7mm (H) x 50.6mm (D)
Packaging (mm):	682mm (W) x 443mm (H) x 119mm (D)

**WEIGHT**

Net with stand:	5.0kg
Net without stand:	4.0kg
Gross:	6.3kg

**REGULATIONS**

CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, BSMI, RCM, GEMS, KC, e-Standby

**PACKAGE CONTENTS**

LCD Display  
Power Cable (1.5m)  
VGA Cable (1.5m) for VSA/VSE/VSI  
HDMI Cable (1.5m) for VSCN  
Audio Cable (1.5m)  
Quick Start Guide