

Acer LCD Monitor Quick Start Guide (QSG)


Important safety instructions

Please read the following instructions carefully.


- To clean the LCD monitor screen:
 - Turn off the LCD monitor and unplug the power cord.
 - Spray a non-solvent cleaning solution onto a rag and clean the screen gently.
- Do not place the LCD monitor near a window. Exposing the monitor to rain, moisture or sunlight can severely damage it.
- Do not apply pressure to the LCD screen. Excessive pressure may cause permanent damage to the display.
- Do not remove the cover or attempt to service this unit yourself. An authorized technician should perform servicing of any nature.
- Store the LCD monitor in a room with a temperature of -20° to 60° C (-4° to 140° F). Storing the LCD monitor outside this range may result in permanent damage.
- Immediately unplug your monitor and call an authorized technician if any of the following circumstances occur:
 - Monitor-to-PC signal cable is frayed or damaged.
 - Liquid spills onto the LCD monitor or the monitor is exposed to rain.
 - The LCD monitor or case is damaged.
- In order to prevent damage to the LCD panel, do not place the monitor face down on a surface.

Connecting your monitor to a computer

- Turn off your computer and unplug your computer's power cord.
- Connect the signal cable to the HDMI (optional) and /or DP (optional) input socket of the monitor, and the HDMI (optional) and /or DP (optional) output socket of the graphics card on the computer.
- USB Type C Cable (Optional, USB Type C input models only) Connect one end of the USB type C cable (optional) to your computer and connect the other end to your electric devices.
- Connect the USB Cable(Optional)
Connect the cable to the fast charging USB 3.0 port (one) to charge. The normal USB 3.0 port (three) are for non-fast charging.
Connect the USB 3.0/USB-B cable to port.
- Insert the monitor power cable into the power port at the back of the monitor.
- Connect the power adapter and power cord to the monitor, then to a properly grounded AC outlet.

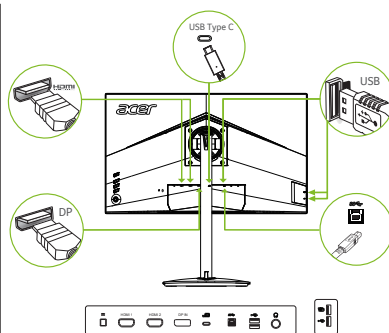

Note: Audio output is only for audio output model. Please check user manual for more instruction.



External controls

1	Power button	Turns the monitor on/off. Amber indicates power on. Blinking amber indicates (Standby/ Power Saving mode/ OSD locked).
2	Function key 	<ol style="list-style-type: none"> Press to view Main page. Press again to enter hotkey1 function. When the Function Menu is active, press this key to view the basic information for your monitor and current input or reset the custom color settings to the factory defaults.
3	Function key 	<ol style="list-style-type: none"> Press to view Main page. Press again to enter hotkey2 function. When the Function Menu is active, press this button to select scenario mode or game mode.
4	Function key 	<ol style="list-style-type: none"> Press to view Main page. Press again to enter Input select function. When the Function Menu is active, this button will quit the OSD.



- a. Press to view Main page. Press again to enter next function in the Function Menu.
- b. The single toggle button on the backside of the Display bezel operates like a joystick. To move the cursor, simply toggle the button in four directions. Press the button to select desired option.

Note: Acer monitor is purposed for video and visual display of information obtained from electronic devices.

AMD FreeSync:

It can allow a AMD FreeSync supported graphics source to dynamically adjust display refresh rate based on typical content frame rates for power efficient, virtually stutter free and low-latency display update.

DP port could support AMD FreeSync, HDMI could support HDMI-VRR (for Xbox One VRR).

Regulations and safety notices

FCC notices

This device has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This device generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this device does cause harmful interference to radio or television reception, which can be determined by turning the device off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the device and receiver.
- Connect the device into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/television technician for help.

CE declaration of conformity

Hereby, Acer Inc., declares that this LCD monitor is in compliance with the essential requirements and other relevant provisions of EMC Directive 2014/30/EU, Low Voltage Directive 2014/35/EU, and RoHS Directive 2011/65/EU and Directive 2009/125/EC with regard to establishing a framework for the setting of ecodesign requirements for energy-related product.

Notice: Shielded cables

All connections to other computing devices must be made using shielded cables to maintain compliance with EMC regulations.

Notice: Peripheral devices

Only peripherals (input/output devices, terminals, printers, etc.) certified to comply with the Class B limits may be attached to this equipment. Operation with non-certified peripherals is likely to result in interference to radio and TV reception.

Caution

Changes or modifications not expressly approved by the manufacturer could void the user authority, which is granted by the Federal Communications Commission, to operate this product.

In order to prevent damage to the monitor, do not lift the monitor by its base.

Operation conditions

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Notice: Canadian users

CAN ICES-3(B)/NMB-3(B)

Disposal of waste equipment by user in private household in the European Union



This symbol on the product or on its packaging indicates that this product must not be disposed of with your other household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste equipment for recycling, please contact your local city office, your household waste disposal service or the shop where you purchased the product.



SPECIFICATION

LCD Panel	Driving system	TFT Color LCD		
	Size	27 "W (69cm)		
	Pixel pitch	0.15525mm(H) x 0.15525mm(V)		
	Brightness	Native: 350nits, HDR400 mode: peak 400nits		
	Contrast	100,000,000:1Max. (ACM)		
	Viewable angle (Typical)	178° (H) 178° (V) (CR≥10)		
	Response time	4ms(GTG)		
	Panel Type	In-Plane Switching		
	H-Frequency	HDMI: 30K~160KHz, DP: 160K~160KHz		
	V-Frequency	HDMI: 40~60Hz(FreeSync:40-60Hz), DP: 40~60Hz(FreeSync:40-60Hz)		
Display Colors		1.07B Colors		
Dot Clock		600MHz		
Max. Resolution		3840x2160 @60Hz		
Plug & Play		VESADDCCI/DDC2B		
Energy Efficiency Class		C		
*Annual Energy Consumption(Typical)		73 (kWh) (for HDMI-input Model)		
Power consumption @200cd/m ²	ON Mode	52W(typ.)		
	Sleep Mode	0.45W(typ.)		
	Off	0.4W(typ.)		
Input Connector		DP (Only DP Model) HDMI (Only HDMI model) USB Hub / USB3.0 x 4 (Only USB Hub Model) USB Type C (Only USB Type C model) USB-B (Only USB-B model)		
Input Video Signal		DP signal(Only DP-Input Model) HDMI signal(Only HDMI-Input Model)		
Speakers(Typical)		4W x 2		
Audio		Audio-Output (Only Audio-Output Model)		
Maximum Screen Size		Horizontal:596.16mm Vertical:335.34mm		
Power Source		100-240V~, 50/60Hz		
Environmental Considerations		Operating Temp: 5° to 35°C Storage Temp: -20° to 60°C Operating Humidity: 20% to 80%		
Dimensions		629 (W) x 420.5-600.5(H) x 269(D)mm		
Weight (N. W.)		6.49kg Unit (net)		
Mechanism spec		Tilt: -5° to +35°, Swivel: 360°, Height adjustment: 180mm, Pivot: Yes Detachable foot stand: Yes		
External Controls:	Functions	Brightness	6-axis Hue	OSD Lock
		Contrast	6-axis Saturate	Input
		Black Boost	Volume	Auto Source
		Blue Light	Mute	Wide Mode
		ACM	Over Drive	PIP/PBP
		HDR	AMD FreeSync	Hot Key Assignment
		Light Sensor	Refresh Rate Num	DDC/CI
		Super Sharpness	Ultra-low latency	HDMI Black Level
		Gamma	Language	Quick Start Mode
		Color Temp.	OSD Timeout	USB Port Select
		Modes	Transparency	USB 3.0
		Color Space		Power-off USB Charge
		Calibration		
Grayscale Mode				
*Specifications may vary depending on model, sku and/or region.				

Find manuals and other documents for your Acer product on the official Acer support website.

*Annual energy consumption is calculated using the typical power consumption 4 hours per day, 365 days per year.

Note:

- HDMI1 (2.0): Support max timing resolution (3840x2160-60Hz), Support (FreeSync & HDR).
- HDMI2 (2.0): Support max timing resolution (3840x2160-60Hz), Support (FreeSync & HDR).
- DP: Support max timing resolution (3840x2160-60Hz), Support (FreeSync & HDR).
- DP ALT: Support max timing resolution (3840x2160-60Hz), Support (FreeSync & HDR).