



Philips
LCD monitor

165 cm (65")

Multi-touch
Full HD

BDL6545AT

Open up a new era of interaction

with the multi-touch LCD display

Take audience participation to a whole new level with the 165 cm (65") full HD LCD display. With your own touch applications, the sky's the limit!

Operational flexibility

- Optical touch technology for advanced user interaction
- Open Pluggable Specification Slot
- Designed for 24/7 operation
- Smart insert in the backcover to place a small pc
- Remote Management and Configuration via RS232

Lower total cost of ownership

- SmartPower for energy saving
- Advanced anti image sticking function

Sustainable and safe

- Temperature sensor measures the health condition
- Complies with RoHS standards to care for the environment

PHILIPS

LCD monitor
165 cm (65") Multi-touch, Full HD

BDL6545AT/00

Highlights

Optical multi-touch

A brand new level of interactivity is now available thanks to the integrated optical touch technology. The sensors on the edge of the screen give you perfect clarity whilst at the same time offering multi-touch interaction, opening up all kinds of possibilities for new interactive applications.

OPS Slot

Developed for the Digital Signage market, the Open Pluggable Specification (OPS) slot is designed to make changing or upgrading your media player mere child's play. Simply plug your media player in to the display - and you're ready. No matter whether you have an entry level, mid-range or high-end media player, OPS is fully

compatible bringing you a lower TCO over the longer term.

SmartPower



The backlight intensity can be controlled and pre-set by the system to reduce the power consumption by up to 50%, which saves substantially on energy costs.

Remote Management:: RS232

Remote Management allows the user to control and adjust the displays remotely via the RS232 protocol. Using CEC commands, you are able to have full control over all the displays in your signage network at any time.

Advanced anti image sticking

Static images left on-screen for extended periods of time may leave a "ghost image" or image sticking effect on LCD displays. Although image sticking in LCD displays is not permanent, you want to prevent this to happen, especially in locations where content is shown 24/7.



Specifications

Picture/Display

- Diagonal screen size: 65 inch / 165.1 cm
- Panel resolution: 1920x1080p
- Optimum resolution: 1920 x 1080 @ 60Hz
- Brightness: 500 cd/m²
- Contrast ratio (typical): 5000:1
- Response time (typical): 5 ms
- Aspect ratio: 16:9
- Viewing angle (H / V): 178 / 178 degree
- Pixel pitch: 0.744 x 0.744 mm
- Display colors: 1.07 billion
- Picture enhancement: 3/2 - 2/2 motion pull down, Motion compens. deinterlacing, Progressive scan, Dynamic contrast enhancement
- Display screen type: LCD Full HD W-UXGA Act. matrix

Supported Display Resolution

• Computer formats

| Resolution | Refresh rate |
|-------------|------------------|
| 640 x 480 | 60, 67, 72, 75Hz |
| 800 x 600 | 56, 60, 72, 75Hz |
| 1024 x 768 | 60Hz |
| 1280 x 768 | 60Hz |
| 1280 x 800 | 60Hz |
| 1280 x 1024 | 60Hz |
| 1360 x 768 | 60Hz |
| 1366 x 768 | 60Hz |
| 1440 x 900 | 60Hz |
| 1600 x 1200 | 60Hz |
| 1920 x 1080 | 60Hz |
| 1920 x 1200 | 60Hz |

• Video formats

| Resolution | Refresh rate |
|------------|--------------|
| 480i | 60Hz |
| 480p | 60Hz |
| 576p | 50Hz |
| 576i | 50Hz |
| 720p | 50, 60Hz |
| 1080i | 50, 60Hz |
| 1080p | 50, 60Hz |

- MAC 640 x 480: 60 Hz
- MAC 832 x 624: 60 Hz
- MAC 1152 x 870: 60 Hz

Convenience

- Tiled Matrix: Up to 5 x 5
- Picture in picture: PIP
- Signal Loop Through: RS232, VGA
- Keyboard control: Hidden, Lockable
- Remote control signal: Lockable
- Ease of installation: AC Out, Carrying Handles, Smart Insert
- Energy saving functions: Ambient light sensor, Smart Power
- Packaging: Reusable box
- Network controllable: RS232
- Placement: Landscape

Operating conditions

- Temperature range (operation): 0 - 40 °C
- Relative humidity: 5 - 90 %
- MTBF: 50,000 hour(s)

Sound

- Built-in speakers: 2 x 10W (8 Ohm)

Accessories

- Included accessories: Remote Control, Batteries for remote control, AC Power Cord, VGA cable, User manual on CD-ROM, Quick start guide
- Optional accessories: Fixed wall mount, Flexible wall mount, Ceiling mount
- Stand: BM06511

Miscellaneous

- On-Screen Display Languages: English, French, German, Italian, Polish, Turkish, Russian, Simplified Chinese
- Regulatory approvals: CE, FCC, Class B, CCC, RoHS
- Warranty: Europe/North America: 3 years

Connectivity

- PC: VGA-in D-Sub 15HD, VGA-out D-Sub 15HD, RS232 D-Sub9, RS232 D-sub9 output, USB B-Type
- Other connections: OPS, HDMI
- AV input: Composite (BNC) x1, S-video x1, DVI-D x1, Component RCA
- AV output: Composite (BNC) x1, Audio (L/R) x2, Audio (L/R) x1

Technical specifications

- Touchpoints: Optical Sensing Touch s

Power

- Standby power consumption: <1W
- Consumption (On mode): Typ. 309W

Dimensions


- Bezel thickness: 45 mm r/l, 42 mm top, 39 mm bottom
- Set dimensions (W x H x D): 1522 x 889 x 124 mm
- Set dimensions in inch (W x H x D): 59.9 x 35.0 x 4.9 inch
- Product weight: 71.6 kg
- Product weight (lb): 157.5
- VESA Mount: 400 x 400 mm, 400 x 200 mm

Packaging dimensions

- EAN: 87 12581 60484 4
- Number of products included: 1
- Packaging type: Carton

Product dimensions

- Product dimensions (W x H x D): 59.9 x 35.0 x 4.8 inch
- Product dimensions (W x H x D): 152.2 x 88.9 x 12.3 cm
- Weight: 157.849 lb
- Weight: 71.6 kg

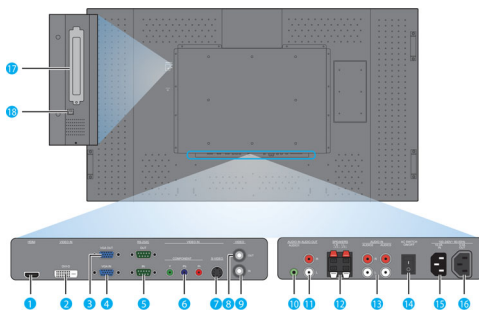

Issue date 2017-07-06

Version: 7.3.3

12 NC: 8670 000 76921
EAN: 87 12581 60484 4

© 2017 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips N.V.
or their respective owners.

www.philips.com