



Philips
LCD monitor

S Line

22 (21.5" / 54.6 cm diag.)
Full HD (1920 x 1080)

221S8LDSB



Reliable and essential

for business efficiency

Our S Line monitor delivers business efficiency. Features like Flicker-free and LowBlue mode make work easy-on-the eyes and increases your productivity.

Brilliant performance

- SmartImage presets for easy optimized image settings
- 16:9 Full HD display for crisp detailed images

Designed for comfortable productivity

- LowBlue Mode for easy on-the-eyes productivity
- Less eye fatigue with Flicker-free technology
- EasyRead mode for a paper-like reading experience

Features for the way you work

- HDMI ensures universal digital connectivity


Sustainable Eco-design

- 100% recyclable packaging
- 25% recycled material with EPEAT Gold
- PVC-BFR free housing

PHILIPS

Highlights

SmartImage

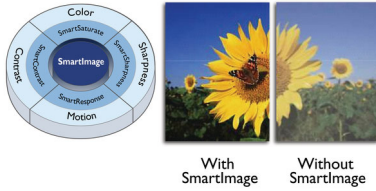

SmartImage is an exclusive leading edge Philips technology that analyzes the content displayed on your screen and gives you optimized display performance. This user friendly interface allows you to select various modes like Office, Photo, Movie, Game, Economy etc., to fit the application in use. Based on the selection, SmartImage dynamically optimizes the contrast, color saturation and sharpness of images and videos for ultimate display performance. The Economy mode option offers you major power savings. All in real time with the press of a single button!

16:9 Full HD display



Picture quality matters. Regular displays deliver quality, but you expect more. This display features enhanced Full HD 1920 x 1080 resolution. With Full HD for crisp detail paired with high brightness, incredible contrast and realistic colors expect a true to life picture.

LowBlue Mode




Studies have shown that just as ultra-violet rays can cause eye damage, shortwave length blue light rays from LED displays can cause eye damage and affect vision over time. Developed for wellbeing, Philips LowBlue Mode setting uses a smart software technology to reduce harmful shortwave blue light.

Flicker-free technology



Due to the way brightness is controlled on LED-backlit screens, some users experience flicker on their screen which causes eye fatigue. Philips Flicker-free Technology applies a new solution to regulate brightness and reduce flicker for more comfortable viewing.

EasyRead mode

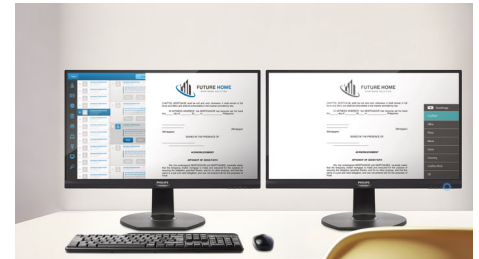

EasyRead mode for a paper-like reading experience

HDMI Ready



An HDMI-ready device has all the required hardware to accept High-Definition Multimedia Interface (HDMI) input. A HDMI cable enables high-quality digital video and audio all transmitted over a single cable from a PC or any number of AV sources (including set-top boxes, DVD players, A/V receivers and video cameras).

Sustainability

Philips is committed to use sustainable, eco-friendly materials across its monitor range. All body plastic parts, metal chassis parts and packing materials use 100% recyclable materials. In selected models, we utilize $\geq 65\%$ Post-Consumer Recycled plastics, ensuring reduction in waste. Strict adherence to RoHS standards ensure substantial reduction or elimination of toxic substances like Lead and Mercury. Our display housing is made up of PVC/BFR free material. For more information, please visit Philips @ <http://www.asimpleswitch.com/global/> to learn more.



Specifications

Picture/Display

- LCD panel type: TFT-LCD (TN)
- Backlight type: W-LED system
- Panel Size: 21.5 inch / 54.6 cm
- Display Screen Coating: Anti-Glare, 3H, Haze 25%
- Effective viewing area: 476.64 (H) x 268.11 (V)
- Aspect ratio: 16:9
- Optimum resolution: 1920 x 1080 @ 60Hz
- Pixel Density: 102 PPI
- Response time (typical): 1 ms (Gray to Gray)*
- Brightness: 250 cd/m²
- Contrast ratio (typical): 1000:1
- SmartContrast: 20,000,000:1
- Pixel pitch: 0.248 x 0.248 mm
- Viewing angle: 170° (H) / 160° (V), @ C/R > 10
- Flicker-free
- Picture enhancement: SmartImage
- Display colors: 16.7 M
- Color gamut (typical): NTSC 72% (CIE1931)
- Scanning Frequency: Horizontal: 30 - 83 kHz (Analog); 30 - 85 kHz (HDMI, Adaptive Sync for HDMI) / Vertical: 50 - 76 Hz (Analog, Digital); 48 - 76 Hz (HDMI, Adaptive Sync for HDMI)
- sRGB
- EasyRead
- LowBlue Mode
- Adaptive sync

Connectivity

- Signal Input: DVI-D (digital, HDCP), VGA (Analog), HDMI 1.4
- Sync Input: Separate Sync, Sync on Green
- Audio (In/Out): Audio out

Convenience

- User convenience: SmartImage, Input, Brightness, Menu, Power On/Off
- Control software: SmartControl
- OSD Languages: Brazil Portuguese, Czech, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Korean, Polish, Portuguese, Russian, Simplified Chinese, Spanish, Swedish, Traditional Chinese, Turkish, Ukrainian
- Other convenience: Kensington lock, VESA mount (100x100mm)
- Plug & Play Compatibility: DDC/CI, Mac OS X, sRGB, Windows 10 / 8.1 / 8 / 7

Stand

- Tilt: -5/25 degree

Power

- ECO mode: 9.1 W (typ.)
- On mode: 14.2 W (typ.) (EnergyStar 7.0 test method)
- Standby mode: < 0.3 W (typ.)

- Off mode: < 0.3 W (typ.)
- Power LED indicator: Operation - White, Standby mode- White (blinking)
- Power supply: Built-in, 100-240VAC, 50-60Hz

Dimensions

- Product with stand(max height): 504 x 395 x 208 mm
- Product with stand(max height): 19.8 x 15.6 x 8.2 inch
- Product without stand (mm): 504 x 304 x 47 mm
- Product without stand in inch: 19.8 x 12.0 x 1.9 inch
- Packaging in mm (WxHxD): 560 x 452 x 138 mm
- Packaging in inch (WxHxD): 22.0 x 17.8 x 5.4 inch

Weight

- Product with stand (kg): 2.80 kg
- Product with stand (lb): 6.16 lb
- Product without stand (kg): 2.46 kg
- Product without stand (lb): 5.41 lb
- Product with packaging (kg): 4.41 kg
- Product with packaging (lb): 9.70 lb

Operating conditions

- Temperature range (operation): 0°C to 40°C °C
- Temperature range (storage): -20°C to 60°C °C
- Relative humidity: 20%-80 %
- Altitude: Operation: +12,000ft (3,658m), Non-operation: +40,000ft (12,192m)
- MTBF (demonstrated): 70,000 hrs (excluded backlight)

Sustainability

- Environmental and energy: EnergyStar 7.0, EPEAT Gold*, TCO certified, RoHS, WEEE
- Recyclable packaging material: 100 %
- Post consumer recycled plastic: 25%
- Specific Substances: PVC / BFR free housing, Mercury free, Lead free

Compliance and standards

- Regulatory Approvals: CE Mark, FCC Class B, SEMKO, cETLus, CU-EAC, TUV Ergo, TUV/GS, EPA, PSB, UKRAINIAN, ICES-003, BSMI, CEL, MEPS, TUV/ISO9241-307, VCCI

Cabinet

- Front bezel: Black/Black
- Rear cover: Black/Black
- Foot: Black/Black
- Finish: Texture

What's in the box?

- Monitor with stand
- Cables: D-Sub cable, HDMI cable, Power cable
- User Documentation



Issue date 2018-08-28

Version: 1.0.1

12 NC: 8670 001 51947
UPC: 6 09585 25185 4

© 2018 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips N.V.
or their respective owners.

www.philips.com

* EPEAT Gold or Silver is valid only where Philips registers the product.
Please visit www.epeat.net for registration status in your country.
* Response time value equal to SmartResponse
* The monitor may look different from feature images.