




22" 10 point touch monitor with edge-to-edge glass and Anti Glare coating

With its Full HD (1920x1080) resolution and accurate Projective Capacitive 10 point touch technology, the ProLite T2236MSC delivers seamless and accurate touch response. The AMVA panel technology guarantees high performance with excellent colour reproduction and high contrast, making it an excellent choice for a vast array of demanding interactive applications. The Anti Glare coating helps to avoid issues with reflections and external light sources affecting colour reproduction, contrast and sharpness. Its flexible stand can be positioned at several angles creating a comfortable and ergonomic user experience.



TOUCH TECHNOLOGY - CAPACITIVE

This technology uses a sensor-grid of micro-fine wires integrated into the glass that covers the screen. Touch is detected because electrical characteristics of the sensor grid change when human finger is placed on the glass. Thanks to the glass overlay this technology is highly durable, and the touch function remains unaffected even if the glass is scratched. It offers perfect picture performance and will work with human finger (gloved or not) and magnetic ball.



AMVA

AMVA technology offers higher contrast, darker blacks and much better viewing angles than standard TN technology. The screen will look good no matter what angle you look at it.

1. DISPLAY CHARACTERISTICS

DIAGONAL	21.5"; 55cm
TOUCHTECHNOLOGY	projective capacitive, multi touch (10 compatible touch points - HID, only with supported OS), activated by finger
PANEL	AMVA LED, AG85
GLASS HARDNESS	7H minimum
DISPLAY AREA H X W	268.1 x 476.6 mm; 10.6" x 18.8 "
RESPONSE TIME	8 ms
CONTRAST	12 000 000 : 1 ACR
CONTRAST	3 000 : 1 with touch panel
BRIGHTNESS	250 cd/m ² typical
BRIGHTNESS	215 cd/m ² with touch panel
VIEWING ZONE	horizontal/vertical: 178° / 178° ; right/left: 89° / 89° ; up/down: 89° / 89°
DISPLAY COLOUR	16.7 million
PIXEL PITCH H X V	0.248 x 0.248 mm
NATIVE RESOLUTION	Full HD 1080p, 1920 x 1080 (2.1 megapixel)
HORIZONTAL SYNC	30 - 80 KHz
VERTICAL SYNC	56 - 75 Hz
SYNCHRONIZATION	Separate Sync
ASPECT RATIO	16 : 9
LIGHT TRANSMITTANCE	85%
BLUE LIGHT REDUCER	yes
ANTI-GLARE COATING	yes

2. INTERFACES & CONNECTORS

ANALOG INPUT CONNECTOR	VGA
DIGITAL INPUT CONNECTOR	DVI-D, HDMI
USB HUB	UP 1 x USB 3.0 / DOWN 4 x USB 3.0
INPUTS	USB (for touch connectivity), USB 3.0

3. SPECIAL FEATURES

PLUG & PLAY	VESA DDC2B™
CONTROLS	On-Screen-Display in 9 languages (EN, FR, DE, ES, IT, PT, RU, JP, Chinese simplified) and 5 front controls (Scroll up / Audio Adjust / Blue light reducer, Scroll down / ECO, Auto, Menu, Power)
USER CONTROLS	luminance (contrast, brightness, ECO, i-Style colour, ACR), image setup (clock, phase, H.position, V.position, aspect), colour temp. (gamma, colour temp.) OSD setup (H.position, V. position, timeout, language), extra (reset, signal select, HDMI audio, OD, information), volume, auto adjust
SPEAKERS	2 x 2 W (Stereo)
ANTI-THEFT-DEVICE	Kensington-lock™ prepared

SAFETY	CE, TÜV-Bauart, CU
TILT ANGLE	90° up; 5° down
VESA MOUNTING	100 x 100 mm
COLOUR	Black

4. ACCESSORIES

DRIVER	multi-touch: Windows 7/8/10 (HID compliant)
INCLUDED ACCESSORIES	power cable, VGA signal cable, DVI-D signal cable, audio cable, USB cable, stand-base, screws, quick start guide, safety guide

5. POWER MANAGEMENT

POWER SUPPLY	AC 100 - 240 V, 50 / 60 Hz
POWER SUPPLY UNIT	internal
POWER USAGE	23 W typical; max. 0.5 W in Power management mode
POWER MANAGEMENT	VESA DPMS

6. EU ENERGY EFFICIENCY LABEL


ENERGY EFFICIENCY CLASS	B
ON MODE POWER CONSUMPTION	23.7W
ANNUAL ENERGY CONSUMPTION	35 kWh/annum*
VISIBLE SCREEN DIAGONAL	55 cm; 21.5"; (22" segment)

This is information under Regulation (EU) No 1062/2010.

**Based on the power consumption of the television operating 4 hours per day for 365 days. The actual energy consumption will depend on how the television is used.*

7. DIMENSIONS & WEIGHT

DIMENSIONS W X H X D	522.5 x 367 x 254 mm
WEIGHT	5.8 kg

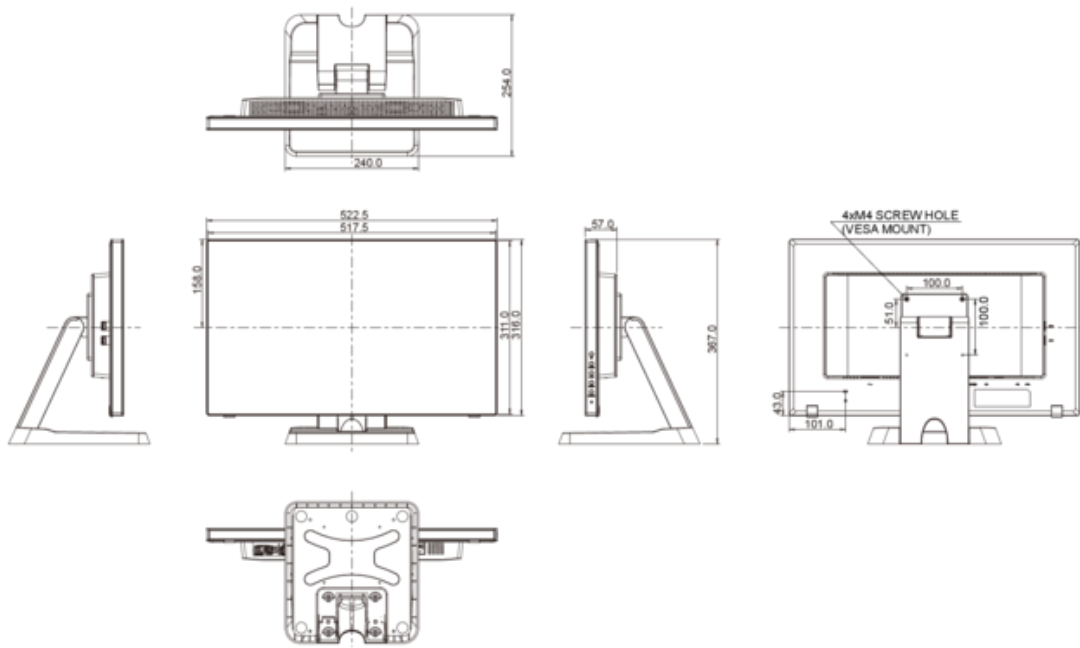

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION (). ALL RIGHTS RESERVED.